

logitech®

DESIGNED FOR BIG ROOMS AND EVEN BIGGER IDEAS.



Logitech GROUP

GROUP, the amazingly affordable video conferencing system for mid to large-size conference rooms, allows any meeting place to be a video collaboration space. It's as simple to use as a mobile phone and affordable as an office chair, now it's easier than ever to include anyone in the conversation.

USB plug-and-play connectivity makes GROUP a breeze to deploy and use. It even works within your own familiar computing environment with any video conferencing software application — including the ones you already use.

Razor sharp video and a beautifully designed full-duplex speakerphone deliver an outstanding collaboration experience that's so awesome everyone can be seen and heard. Simply connect a laptop and start a meeting, or use the state-of-the-art speakerphone with a Bluetooth® wireless technology enabled mobile device for great-sounding audio calls.



Bluejeans

lifesize

zoom




broadsoft




Logitech GROUP

GROUP Room Set-up

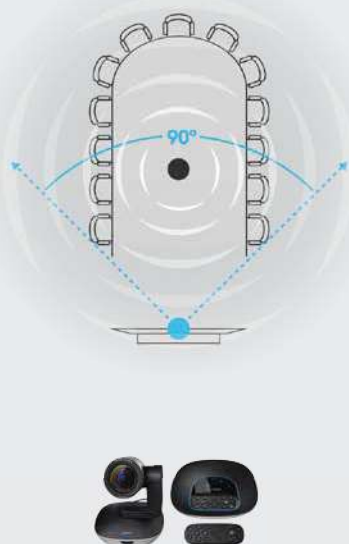

GROUP + Expansion Mics Room Set-up

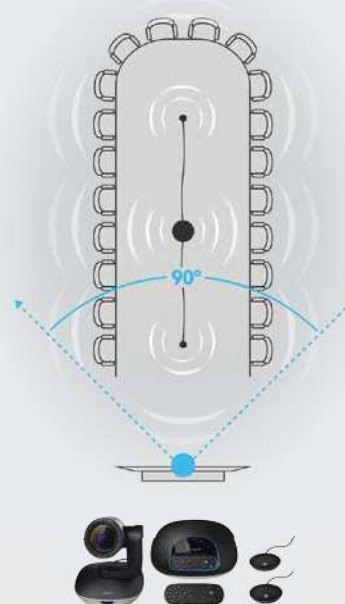

Video Conferencing Elevated.

GROUP, our video conferencing solution for groups of 14–20 people, delivers high quality HD video and crystal clear audio, allowing any meeting place to be a video collaboration space. With advanced features like acoustic echo cancellation, noise reduction technology, and intuitive controls now it's easier than ever to include anyone in the conversation.

Video Collaboration Made Simple.

USB plug-and-play connectivity makes GROUP easy to use. Simply connect a laptop to conduct life-like meetings within your own familiar computing environment for use with any video conferencing software application — including the ones you already use. Plus, you can use the state-of-the-art speakerphone with a *Bluetooth* wireless technology enabled mobile device for great-sounding audio calls.

Your Meeting Space. Your Way.

GROUP offers the flexibility to customize conference room set-up with multiple camera mounting options. Use the camera on the table or mount it on the wall with included hardware. The bottom of the camera is designed with a standard tripod thread for added versatility. Conference participants can also clearly converse within a 6m/20' diameter around the base, or extend the range to 8.5m/28' with optional expansion mics.



For razor sharp close-ups of objects and whiteboard content, the GROUP camera offers 10x lossless zoom enabling your team to see every detail with outstanding resolution and clarity.



Logitech GROUP



VIDEO

HD 1080p video quality at 30 frames-per-second

Brings life-like full HD video to conference calls, enabling expressions, non-verbal cues and movements to be seen clearly.

H.264 with Scalable Video Coding (SVC) and UVC 1.5

Preserves PC processing and battery power by putting video processing within the camera adjusting dynamically to the available bitstream. The result is a smoother video stream in applications like Microsoft® Lync® 2013, Skype for Business and in Windows® 8 and Windows® 10.

90° field of view with mechanical 260° pan and 130° tilt

The generously wide field of view and silky smooth pan and tilt controls enhance collaboration by making it easy to see everyone in the room.

10x lossless HD zoom

Zero in on close-ups of objects and whiteboard content with outstanding detail and clarity.

Autofocus

High-precision lens automatically focuses on people and objects to deliver razor-sharp resolution wherever the lens is pointed.

ZEISS® lens certification

Logitech designs and manufactures all ConferenceCam lenses to the highest technical standards to produce optical components of outstanding quality as certified by ZEISS.

Far-end camera control

Operate camera pan, tilt and zoom functions¹ of another Logitech ConferenceCam or Webcam C930e in the other location.

5 camera presets

Multiple camera presets make it easy to frame and focus the lens on frequently used views — such as the conference table, whiteboard, and close-ups — and quickly return to each view at the touch of a button.

Plug-and-play camera setup

Simply connect camera to powered hub with 4.9m/16' cable provided to get up and running in a snap.



AUDIO

Full-duplex speakerphone

Hear and be heard with life-like sound that's crisp, clear, and highly intelligible. Plus the cast metal base console is loaded with advanced audio features and intuitive controls.

Spacious audio

Conference participants can converse within a 6m/20' diameter around the speakerphone and be heard so clearly by remote participants that it seems like conversations are happening in the same room.

Optional expansion mics

Expand the conversation area from 6m/20' to 8.5m/28' so that even those away from the speakerphone can be clearly heard. Microphones, sold in pairs, are automatically recognized and configured by simply plugging them into the GROUP speakerphone.

Beamforming technology with four omni-directional mics

Conversations sound realistic and natural by minimizing sound reflections (reverb) and distracting audio artifacts.

Acoustic echo cancellation

Advanced acoustic engineering reduces echo, making calls sound more natural.

Noise reduction technology

Ambient noises and other distracting tones are suppressed to support comfortable, natural-sounding conversation on both ends of the call.

HD audio

High bandwidth audio reproduces vocal tones with exceptional quality, enabling people on both sides of the call to enjoy a life-like communication experience.

Visual call status indicator

Onboard LEDs flash to provide visual alerts when on a call, when there's an incoming call and when an incoming call is muted.

LCD displays Caller ID and other info

View call-related info² (Caller ID, call duration, etc.) and speakerphone/camera function indicators (volume control, etc.) on LCD display screen.

Plug-and-play speakerphone setup

Simply plug the speakerphone into the powered hub with the supplied 4.9m/16' cable to get up and running in no time.



CONNECTIVITY AND USAGE

Tight integration with top cloud communication apps

Logitech partners with the top communication developers to ensure the most integrated and seamless experience when using GROUP.

Compatible with Mac® and PC

Simply connect a PC or Mac® to conduct meetings within the user's own familiar computing environment.

Works with most UC and video conferencing applications

Users are free to use the desktop video conferencing application of their choice.

Bluetooth wireless technology and Near Field Communication (NFC) technology³

Connect the speakerphone to a Bluetooth wireless technology enabled device for great-sounding audio calls, or pair NFC-enabled mobile devices by simply bringing them close together.

Professional-grade certifications

Leading business certifications (Optimized for Microsoft® Lync® 2013, Certified for Skype for Business, Cisco Jabber® and WebEx® compatible⁴) and enhanced integration with Logitech Collaboration Program (LCP) members⁵ ensure an integrated experience with most business-grade video conferencing platforms.

Multiple camera mounting options and device setup configurations

Set up the conference room the way you want with up to a 9.8m/32' range between camera and speaker. Use the camera on the table or mount it on the wall with included hardware. The bottom of the camera is designed with a standard tripod thread for added versatility.

Dockable remote control

Operate camera pan, tilt and zoom, volume up/down and answer/hang-up⁶ functions on the base speakerphone console or with remote control that docks in console when not in use.

PTZ app

Control local camera pan, tilt and zoom functions from PC or Mac with simple-to-use software app.

Logitech GROUP

TECH SPECS

CAMERA

Smooth motorized pan, tilt and zoom, controlled from remote or console

260°pan, 130° tilt

10x lossless HD zoom

90° Field of View

Full HD 1080p 30fps

H.264 UVC 1.5 with Scalable Video Coding (SVC)

Autofocus

5 camera presets

Far-end control (PTZ) of ConferenceCam products

ZEISS lens certification

Kensington security slot

LED to confirm video streaming

Standard tripod thread

REMOTE CONTROL

Dockable

8.5m/28-foot range

SPEAKERPHONE

Full-duplex performance

Acoustic echo cancellation

Noise reduction technology

Ultra-wideband audio

Bluetooth and NFC wireless technology

LCD for caller ID, call duration and other functional response

LEDs for speakerphone streaming, mute, hold, and Bluetooth wireless pairing

Touch controls for call answer/end, volume and mute, Bluetooth plus camera PTZ, "home" preset and far-end control

Microphones (Tx)

Four omni-directional microphones supporting 20-foot diameter range

Frequency response: 100Hz–11KHz

Sensitivity: -28dB +/-3dB

Distortion: <1% @ 1KHz at 106dB

Speakers (Rx)

Frequency response: 120Hz–14KHz

Sensitivity: 83dBSPL +/-3dB at 1W/1M

Max output: 91dBSPL

Distortion: <5% from 200Hz

Kensington security slot

HUB/CABLE

Central mountable hub for connection of all components

Included adhesive solution for under-table mounting

Two cables for connection between hub and camera/speakerphone (Length: 5m/16')

One USB cable for connection to PC/Mac (Length: 3m/6.6')

AC Power adapter (Length: 3m/9.8')

MOUNT

Dual purpose mount for wall placement or for elevating the camera on a table

COMPLIANCE AND TOOLS

USB 2.0 compliant

UVC-compliant video and audio for broad application compatibility

Optimized for Microsoft® Lync®, Certified for Skype for Business, Cisco Jabber® and WebEx® compatible. Enhanced integration with Logitech Collaboration Program (LCP) members.

Downloadable diagnostic tool

Field upgradeable firmware tool

Downloadable app plug-ins for advanced feature support

PRODUCT SPECIFICATIONS

Logitech GROUP

Price: \$1399.99
Part #: 960-001054
UPC: 097855118462

Expansion Mics

Price: \$399.99
Part #: 989-000171
UPC: 097855119551

Logitech GROUP + ExpansionMics

Price: \$1749.99
Part #: 960-001060
UPC: 097855119551

SYSTEM REQUIREMENTS

Windows® 7, Windows® 8 or Windows® 10
Mac® OS X 10.7 or higher
Google Chromebook Version 29 or higher

Note: For full HD support, please check with your software application provider for system requirements

PRODUCT DIMENSIONS + WEIGHT

Camera

130 x 170 x 138 mm
5.1 x 7 x 5.4"
585g/21oz

Speakerphone

240 x 65 x 240 mm
9.5 x 2.5 x 9.5"
1223g/43oz

Hub

94 x 34 x 74 mm
3.75 x 1.3 x 2.9"
83g/3oz

Remote

50 x 120 x 12 mm
2 x 5 x 0.5"
51g/2oz

Package

500 x 152 x 310 mm
19.75 x 6 x 12.25"
4.1kgs/9lbs

Wall/Table Mount

210 x 120 x 99 mm
8.27 x 4.72 x 3.90"
255g/8.99 oz

Expansion Mics

83 x 83 x 21 mm
3.3 x 3.3 x 0.83"
230g/8oz

INSIDE THE BOX

Camera, speakerphone, remote control, two 5m/16.4' cables for connection between speakerphone and hub and camera and hub, one 3m/9.8' meter cable between hub and PC, Velcro for cable management, Velcro for hub to table securing, powered hub, power adapter with regional plugs, mount, quick start guide, warranty card.

WARRANTY

2-year limited hardware

www.logitech.com/GROUP

To order, contact your reseller or call us at 800-308-8666

Logitech Inc. 7700 Gateway Blvd., Newark, CA 94560

¹ With Microsoft® Lync® 2010 and 2013, Skype for Business, and Logitech Collaboration Program (LCP) members, including Vidyo, Zoom and Lifesize Cloud (refer to www.logitech.com/lcp for the latest information)

² With Microsoft® Lync® 2013, Skype™ and Cisco Jabber®


³ With NFC-enabled mobile devices

⁴ See www.logitech.com/ciscocompatibility for the latest version

⁵ Includes Blue Jeans, BroadSoft, Lifesize, Vidyo, and Zoom. See www.logitech.com/lcp for full list and the latest information

⁶ With Microsoft® Lync® 2013, Skype for Business, Skype™, Cisco Jabber® and LCP participants with completed integrations

© 2016 Logitech. Logitech, the Logitech logo and other Logitech marks are owned by Logitech and may be registered. All other trademarks are the properties of their respective owners. Logitech assumes no responsibility for any errors that may appear in this publication. Product, pricing and feature information contained herein is subject to change without notice.

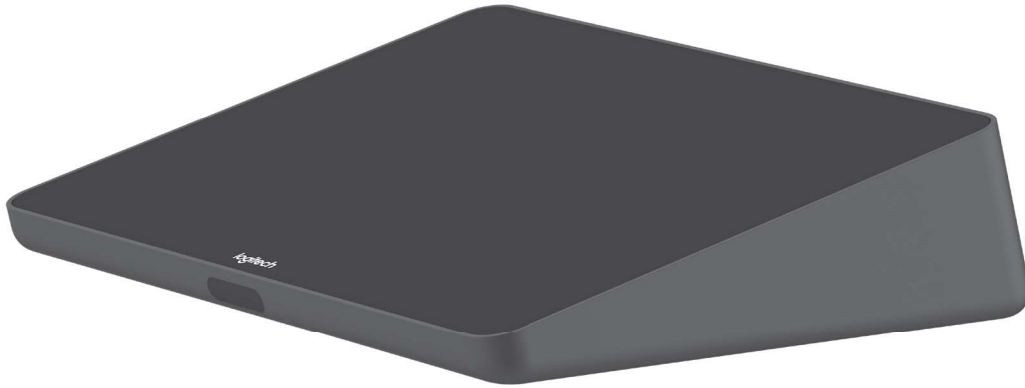

DATA SHEET **LOGITECH TAP**

Deliver one-touch join, calendar integration, instant content sharing, and a consistent experience across meeting rooms. With a sleek design, silent operation, and motion sensor for always-on readiness, Tap brings ease and convenience to video collaboration.

MEETING ROOM TOUCH CONTROLLER FOR VIDEO CONFERENCING ROOM SOLUTIONS

More than just a meeting room touch controller, Logitech Tap is what helps you achieve a consistent user experience across your entire deployment.

Boasting a spacious 10.1" touchscreen, low-profile enclosure, and multiple mounting accessories, Logitech Tap delivers a sleek appearance and convenient placement options that support a wide range of room sizes and layouts. And, with its HDMI input, content sharing is instant and effortless. Wireless content sharing is also available depending on your chosen video conferencing service.



- 1 One-touch join:** Easily start and join meetings with just one tap.
- 2 10.1" touch display:** Spacious and responsive touch screen resists fingerprints and glare for high legibility and easy operation.
- 3 Sleek, low profile:** Comfortable 14° angle allows for easy viewing, while providing an unobtrusive presence in the room.
- 4 Always-on readiness:** Built-in motion sensor saves power when idle, and powers on when a person approaches.
- 5 Headphone jack:** Extends the host computer's wired audio capabilities to the tabletop, ideal for private conversations and for the hearing-impaired.
- 6 Dual cable exits:** A sturdy metal cover with removable bottom and rear exits keep cables tidy and secure.
- 7 Clean cable management:** Built-in cable retention and strain relief system hides the cable entirely within its enclosure, and secures it to prevent unwanted disconnections.
- 8 USB accessory port:** Connect an accessory such as a USB speakerphone.
- 9 HDMI input for content sharing:** Provides instant wired content sharing when used with Google Meet™, Microsoft Teams Rooms™, and Zoom Rooms™.
- 10 Anti-theft protection:** Keep Tap securely in place by connecting a security cable to one of Tap's two Kensington lock slots, one on the bottom and another at the back.

ENTERPRISE READY



Clean Installation

Flexible cabling lets you locate Tap near participants for convenient operation while installing the host computer in a cabinet, beneath a table, or behind a display.





Multiple Mounting Options

Secure Tap flat to the table, raise the viewing angle, or mount it on the wall to conserve space, minimize cabling, and optimize the user experience.

ROOM SOLUTIONS WITH LOGITECH TAP

Easily deploy video meetings with pre-configured Logitech room solutions for Google Meet™ and Microsoft Teams™, which include everything you need - Tap, a conference camera or video bar, and PC compute - to start building meeting rooms of virtually any shape or size.



Find Your Perfect Match

Tap works seamlessly with Logitech's lineup of PC-based video bars and modular systems for small, medium, and large rooms.



Laptop Link for Meeting Rooms

Add bring-your-own-device versatility with Logitech Swytch, a convenient way to use the room's display and conference camera with any video meeting or webinar application.



Shown with Logitech Rally Bar.

PRODUCT DIMENSIONS	PORTS & INTERFACES	PACKAGE CONTENTS
Device Total Height x Width x Depth: 58 x 244 x 179 mm 2.3 x 9.6 x 7.0 in 1.25 kg (2.75 lbs)	USB 2.0/3.0/3.1 Type C (to PC) USB 2.0 Type A (for accessory connection) HDMI input (for content sharing) 3.5mm/1/8 " 4 pole Headset Jack Integrated ultrasonic speaker Integrated PIR Motion Sensor 100mm x 100mm VESA FDMI (Flat Display Mounting Interface) Kensington Lock Slots (2)	Logitech Tap with Cat5e Kit Tap Touch Controller Cat5e Kit Logitech Tap Receiver Dongle Transceiver 100-240v Power Supply with International Adaptor Set 2.97 m Cat5e Cable 7.0 m Cat5e Cable HDMI 1.4a cable 2.0 m Microfiber Cloth Documentation
SYSTEM REQUIREMENTS	COMPATIBILITY AND CERTIFICATIONS	OPTIONAL ACCESSORIES
Windows® 10 Chrome™ OS 80 and higher Logi CollabOS USB 2.0, 3.0, or 3.1 Type A port	Logitech Tap is certified as a touch controller for video conferencing room solutions: Google Meet GoToRoom Microsoft Teams Rooms Pexip Room RingCentral Rooms Zoom Rooms See www.logitech.com/support/tap-compatibility for pending and granted certifications and compatibility updates. DisplayLink Plug and Display™: Tap connects via USB as an additional display for supported operating systems, including Windows 10 and Chrome OS	Table Mount Riser Mount Wall Mount Cat5e Kit (for Tap devices currently connected with Strong USB) Logitech Strong USB cable: 10 m, 25 m, 45 m (for Tap devices currently connected with Strong USB)
DEVICE MANAGEMENT		
Monitor and manage with Logitech Sync remote management, Microsoft Teams Admin Center, and Zoom Device Management platforms.		
WARRANTY	PART NUMBERS	
Standard: 2-year limited hardware warranty included Extended: Additional one-year extended warranty available at the time of hardware purchase. Contact your reseller for availability.	Logitech Tap with Cat5e Kit: 939-001950	



www.logitech.com/Tap

Contact your reseller
or contact us at
www.logitech.com/vcsales

Logitech Americas
7700 Gateway Blvd.
Newark, CA 94560 USA

Logitech Europe S.A.
EPFL - Quartier de l'Innovation
Daniel Borel Innovation Center
CH - 1015 Lausanne

Logitech Asia Pacific Ltd.
Tel : 852-2821-5900
Fax : 852-2520-2230

© 2021 Logitech. Logitech, the Logitech logo and other Logitech marks are owned by Logitech and may be registered. All other trademarks are the properties of their respective owners. Logitech assumes no responsibility for any errors that may appear in this publication. Product, pricing and feature information contained herein is subject to change without notice.

Published September 2021

ASUS NUC 14 PRO

Smaller, Faster, Better, AI Ready



ASUS NUC 14 Pro delivers best-in-class performance thanks to the all-new Intel® Core™ Ultra processor family. It is the most comprehensive mini-PC built with Intel vPro® Enterprise for exceptional security, manageability, and stability. With certified Bluetooth® dongle-free connectivity and three AI engines for high throughput, low power, and fast response, ASUS NUC 14 Pro delivers robust computing capabilities. It is equipped with Wi-Fi sensing for intelligent energy efficiency, and its “tried and trusted” 4x4-inch chassis is designed for toolless access, making upgrades easy, safe, and fast.

Key Selling Points

Performance: Delivers best-in-class performance among comparable mini-PC offerings

Manageability: Most comprehensive mini-PC with Intel vPro® Enterprise for exceptional security, manageability, and stability

AI Ready: Harnesses the prowess of Intel® Core™ Ultra processors’ three AI engines – GPU, NPU, and CPU – for high throughput, low power, and fast response

Wi-Fi Sensing: Takes advantage of Wi-Fi sensing to deliver instant availability while reducing power consumption

Wireless Connectivity: Delivers seamless connectivity for [certified Bluetooth® dongle-free experiences](#)

Customizable: Designed for toolless chassis access making upgrades easier, safer, and faster

Audience:

- Small and Medium Business Enterprises
- Retail
- Education
- Collaboration
- Remote Workers

Target Usages:

- Traditional and Smart Classrooms
- Communication File Sharing/ Virtual Meetings
- Daily Tasks/ Entertainment
- Digital Signage / Kiosk / POS

ASUS NUC 14 PRO

Mini-PC Specifications



Image A



Image B

Marketing Name	ASUS NUC 14 Pro Mini-PC		ASUS NUC 14 Pro Mini-PC
Project Code	NUC14RVH		NUC14RVK
Photo	Image A		Image B
ASUS Logo	Yes		Yes
ASUS NUC Logo	Yes		Yes
Color	Black		Black
OS Support	Windows 11 64-bit		Windows 11 64-bit
CPU	Intel® Core™ Ultra 7 Processor 165H w/ vPro, cTDP 40W Intel® Core™ Ultra 7 Processor 155H, cTDP 40W Intel® Core™ Ultra 5 Processor 135H w/ vPro, cTDP 40W Intel® Core™ Ultra 5 Processor 125H, cTDP 40W Intel® Core™ 3 Processor 100U, cTDP 25W		Intel® Core™ Ultra 7 Processor 165H w/ vPro, cTDP 40W Intel® Core™ Ultra 7 Processor 155H, cTDP 40W Intel® Core™ Ultra 5 Processor 135H w/ vPro, cTDP 40W Intel® Core™ Ultra 5 Processor 125H, cTDP 40W Intel® Core™ 3 Processor 100U, cTDP 25W
Chipset	Integrated		Integrated
Graphics	Intel® Arc™ GPU (Core Ultra) ¹ Intel® Graphics (Core3)		Intel® Arc™ GPU (Core Ultra) ¹ Intel® Graphics (Core3)
Memory	2 x SO-DIMM, Up to DDR5-5600, 48GB*2		2 x SO-DIMM, Up to DDR5-5600, 48GB*2
Storage	1 x M.2 2280 PCIe Gen4x4, supports 128GB~4TB NVMe SSD 1 x M.2 2242 PCIe Gen4x4, supports 128GB~2TB NVMe SSD 1 x SATA Port for 2.5in SSD/HDD, supports 128GB~4TB SATA drive		1 x M.2 2280 PCIe Gen4x4, supports 128GB~4TB NVMe SSD 1 x M.2 2242 PCIe Gen4x4, supports 128GB~2TB NVMe SSD
Wireless Network	Intel® Wi-Fi 6E AX211 (Gig+), Bluetooth 5.3		Intel® Wi-Fi 6E AX211 (Gig+), Bluetooth 5.3
LAN	Intel® Ethernet Controller I226-V/LM, 2.5G ²		Intel® Ethernet Controller I226-V/LM, 2.5G ²
Audio	N/A		N/A
TPM	fTPM		fTPM
Card Reader	None		None
HDMI CEC	Yes, 2 ports on back panel		Yes, 2 ports on back panel
Front I/O Ports	1 x USB 3.2 Gen2x2 Type-C 2 x USB 3.2 Gen2 Type-A		1 x USB 3.2 Gen2x2 Type-C 2 x USB 3.2 Gen2 Type-A
Back I/O Ports	2 x Thunderbolt 4 Type-C w/ DisplayPort 1.4 1 x USB 3.2 Gen 2 Type-A 1 x USB 2.0 Type-A 2 x HDMI 2.1 (TMDS) 1 x RJ45 LAN 1 x DC-in		2 x Thunderbolt 4 Type-C w/ DisplayPort 1.4 1 x USB 3.2 Gen 2 Type-A 1 x USB 2.0 Type-A 2 x HDMI 2.1 (TMDS) 1 x RJ45 LAN 1 x DC-in
Side I/O Ports	1 x Kensington Lock		1 x Kensington Lock
Power Supply	19VDC, 6.32A, 120W Power Adapter (Core Ultra) 19VDC, 4.74A, 90W Power Adapter (Core3)		19VDC, 6.32A, 120W Power Adapter (Core Ultra) 19VDC, 4.74A, 90W Power Adapter (Core3)
Operating Temp	0 to 40C		0 to 40C
Storage Temp	-40 to 60C		-40 to 60C
Humidity	0%-92% non-condensing		0%-92% non-condensing
Dimensions (W x D x H)	117mm x 112mm x 54mm		117mm x 112mm x 37mm
Weights	600g (Core Ultra) 571g (Core3)		500g (Core Ultra) 470g (Core3)
Accessories	AC Adapter+Power Cord ³ VESA Bracket and Screws M3 Screws for 2.5in Drive Cable Clip Safety/Caution/Regulatory Insert Warranty Card		AC Adapter+Power Cord ³ VESA Bracket and Screws Cable Clip Safety/Caution/Regulatory Insert Warranty Card

(1) Intel® Arc™ GPU requires using 2 x SO-DIMM

(2) Intel® Ethernet Controller I226-LM included on vPro enabled systems

(3) Power cord included is region specific, and some SKUs do not include the power cord

ASUS NUC 14 PRO

Kit Specifications



Image C



Image D

Marketing Name	ASUS NUC 14 Pro Kit	
Project Code	NUC14RVH-B	
Photo	Image C	Image D
ASUS Logo	No	No
ASUS NUC Logo	No	No
Color	Black	Black
OS Support	Windows 11 64-bit Ubuntu 24.04 LTS 64-bit RedHat Enterprise Linux 64-bit	Windows 11 64-bit Ubuntu 24.04 LTS 64-bit RedHat Enterprise Linux 64-bit
CPU	Intel® Core™ Ultra 7 Processor 165H w/ vPro, cTDP 40W Intel® Core™ Ultra 7 Processor 155H, cTDP 40W Intel® Core™ Ultra 5 Processor 135H w/ vPro, cTDP 40W Intel® Core™ Ultra 5 Processor 125H, cTDP 40W Intel® Core™ 3 Processor 100U, cTDP 25W	Intel® Core™ Ultra 7 Processor 165H w/ vPro, cTDP 40W Intel® Core™ Ultra 7 Processor 155H, cTDP 40W Intel® Core™ Ultra 5 Processor 135H w/ vPro, cTDP 40W Intel® Core™ Ultra 5 Processor 125H, cTDP 40W Intel® Core™ 3 Processor 100U, cTDP 25W
Chipset	Integrated	Integrated
Graphics	Intel® Arc™ GPU (Core Ultra) ¹ Intel® Graphics (Core3)	Intel® Arc™ GPU (Core Ultra) ¹ Intel® Graphics (Core3)
Memory	2 x SO-DIMM, Up to DDR5-5600, 48GB*2	2 x SO-DIMM, Up to DDR5-5600, 48GB*2
Storage	1 x M.2 2280 PCIe Gen4x4, supports 128GB~4TB NVMe SSD 1 x M.2 2242 PCIe Gen4x4, supports 128GB~2TB NVMe SSD 1 x SATA Port for 2.5in SSD/HDD, supports 128GB~4TB SATA drive	1 x M.2 2280 PCIe Gen4x4, supports 128GB~4TB NVMe SSD 1 x M.2 2242 PCIe Gen4x4, supports 128GB~2TB NVMe SSD
Wireless Network	Intel® Wi-Fi 6E AX211 (Gig+), Bluetooth 5.3	Intel® Wi-Fi 6E AX211 (Gig+), Bluetooth 5.3
LAN	Intel® Ethernet Controller I226-V/LM, 2.5G ²	Intel® Ethernet Controller I226-V/LM, 2.5G ²
Audio	N/A	N/A
TPM	fTPM	fTPM
Card Reader	None	None
HDMI CEC	Yes, 2 ports on back panel	Yes, 2 ports on back panel
Front I/O Ports	1 x USB 3.2 Gen2x2 Type-C 2 x USB 3.2 Gen2 Type-A	1 x USB 3.2 Gen2x2 Type-C 2 x USB 3.2 Gen2 Type-A
Back I/O Ports	2 x Thunderbolt 4 Type-C w/ DisplayPort 1.4 1 x USB 3.2 Gen 2 Type-A 1 x USB 2.0 Type-A 2 x HDMI 2.1 (TMDS) 1 x RJ45 LAN 1 x DC-in	2 x Thunderbolt 4 Type-C w/ DisplayPort 1.4 1 x USB 3.2 Gen 2 Type-A 1 x USB 2.0 Type-A 2 x HDMI 2.1 (TMDS) 1 x RJ45 LAN 1 x DC-in
Side I/O Ports	1 x Kensington Lock	1 x Kensington Lock
Power Supply	19VDC, 6.32A, 120W Power Adapter (Core Ultra) 19VDC, 4.74A, 90W Power Adapter (Core3)	19VDC, 6.32A, 120W Power Adapter (Core Ultra) 19VDC, 4.74A, 90W Power Adapter (Core3)
Operating Temp	0 to 40C	0 to 40C
Storage Temp	-40 to 60C	-40 to 60C
Humidity	0%-92% non-condensing	0%-92% non-condensing
Dimensions (W x D x H)	117mm x 112mm x 54mm	117mm x 112mm x 37mm
Weights	600g (Core Ultra) 571g (Core3)	500g (Core Ultra) 470g (Core3)
Accessories	AC Adapter+Power Cord ³ VESA Bracket and Screws M3 Screws for 2.5in Drive Cable Clip Safety/Caution/Regulatory Insert Warranty Card	AC Adapter+Power Cord ³ VESA Bracket and Screws Cable Clip Safety/Caution/Regulatory Insert Warranty Card

(1) Intel® Arc™ GPU requires using 2 x SO-DIMM

(2) Intel® Ethernet Controller I226-LM included on vPro enabled systems

(3) Power cord included is region specific, and some SKUs do not include the power cord



Image E

ASUS NUC 14 PRO

Board Specifications

Marketing Name	ASUS NUC 14 Pro Board
Project Code	NUC14RVB-M
Photo	Image E
ASUS Logo	N/A
ASUS NUC Logo	N/A
Color	N/A
OS Support	Windows 11 64-bit Ubuntu 24.04 LTS 64-bit RedHat Enterprise Linux 64-bit
CPU	Intel® Core™ Ultra 7 Processor 165H w/ vPro, cTDP 40W Intel® Core™ Ultra 7 Processor 155H, cTDP 40W Intel® Core™ Ultra 5 Processor 135H w/ vPro, cTDP 40W Intel® Core™ Ultra 5 Processor 125H, cTDP 40W Intel® Core™ 3 Processor 100U, cTDP 25W
Chipset	Integrated
Graphics	Intel® Arc™ GPU (Core Ultra) ¹ Intel® Graphics (Core3)
Memory	2 x SO-DIMM, Up to DDR5-5600, 48GB*2
Storage	1 x M.2 2280 PCIe Gen4x4, supports 128GB~4TB NVMe SSD 1 x M.2 2242 PCIe Gen4x4, supports 128GB~2TB NVMe SSD 1 x SATA Power/DATA header for 2.5in SSD/HDD, supports 128GB~4TB SATA drive
Wireless Network	Intel® Wi-Fi 6E AX211 (Gig+), Bluetooth 5.3
LAN	Intel® Ethernet Controller I226-V/LM, 2.5G ²
Audio	N/A
TPM	fTPM
Card Reader	None
HDMI CEC	Yes, 2 ports on back panel
Front I/O Ports	1 x USB 3.2 Gen2x2 Type-C 2 x USB 3.2 Gen2 Type-A
Back I/O Ports	2 x Thunderbolt 4 Type-C w/ DisplayPort 1.4 1 x USB 3.2 Gen 2 Type-A 1 x USB 2.0 Type-A 2 x HDMI 2.1 (TMDS) 1 x RJ45 LAN 1 x DC-in
Side I/O Ports	N/A
Power Supply	Not Included
Operating Temp	0 to 50C
Storage Temp	-40 to 60C
Humidity	0%-92% non-condensing
Dimensions (W x D x H)	107mm x 102mm x 29mm
Weights	227g (Core Ultra) 195g (Core3)
Accessories	Warranty Card Safety/Caution/Regulatory Insert


(1) Intel® Arc™ GPU requires using 2 x SO-DIMM

(2) Intel® Ethernet Controller I226-LM included on vPro enabled systems

(3) Power cord included is region specific, and some SKUs do not include the power cord

ASUS NUC 14 PRO

Model NUC14RVH (Tall) Connections

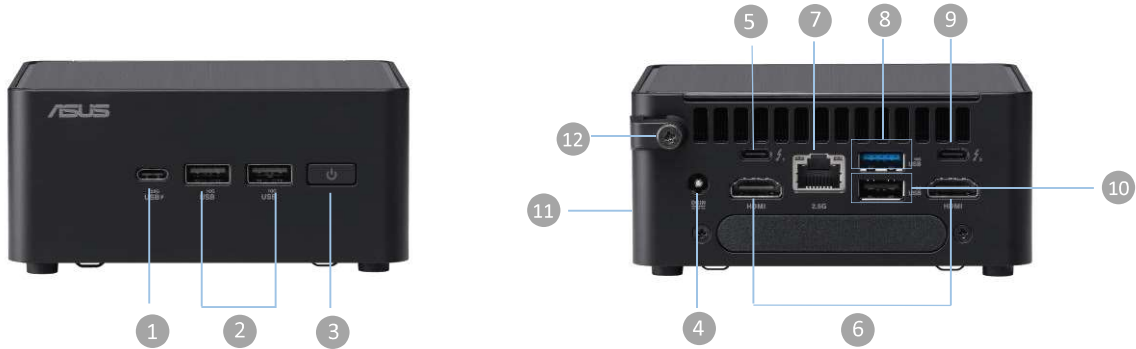


- 1 1x USB 3.2 Gen2x2, Type-C
- 2 2x USB 3.2 Gen2, Type-A
- 3 1x Power Bottom
- 4 1x DC-in

- 5 1x Thunderbolt™ 4
- 6 2x HDMI 2.1 (TMDS)
- 7 1x 2.5Gb Ethernet
- 8 1x USB 3.2 Gen 2, Type-A

- 9 1x Thunderbolt™ 4
- 10 1x USB 2.0, Type-A
- 11 1x Kensington Lock (Side Port)
- 12 1x Security mechanism for power cable

Model NUC14RVK (Slim) Connections

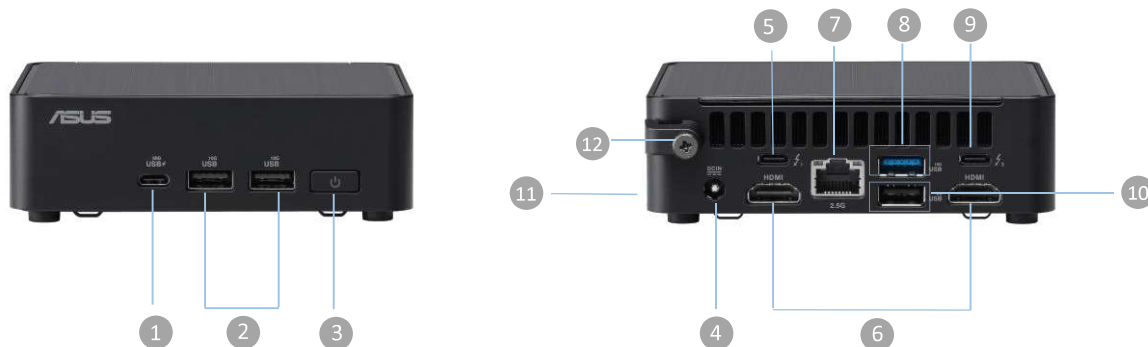

- 1 1x USB 3.2 Gen2x2, Type-C
- 2 2x USB 3.2 Gen2, Type-A
- 3 1x Power Bottom
- 4 1x DC-in

- 5 1x Thunderbolt™ 4
- 6 2x HDMI 2.1 (TMDS)
- 7 1x 2.5Gb Ethernet
- 8 1x USB 3.2 Gen 2, Type-A

- 9 1x Thunderbolt™ 4
- 10 1x USB 2.0, Type-A
- 11 1x Kensington Lock (Side Port)
- 12 1x Security mechanism for power cable


ASUS NUC 14 PRO

What's in the box



Or

NUC 14 PRO




Power Adapter
90 / 120 W



Inserts



Power Cord*



VESA bracket and
Screws

NOTE:

- The most up-to-date and accurate product specifications are available on www.asus.com for download.
- Product and accessory images are for illustrative purposes only. The actual appearance and specifications may vary depending on the model.
- *The bundled power adapter may vary depending on the model and the country (or region) of sale.
- Some bundled accessories may vary depending on the model. For details on these accessories, refer to their respective user manuals.
- If the device or its components fail or malfunction during normal and proper use within the warranty period, bring the warranty card to the ASUS Service Center for replacement of the defective components.