logitech®





DATA SHEET LOGITECH MEETUP

Create plug-and-play video conferencing with MeetUp, an all-in-one USB conference camera for small rooms and spaces. MeetUp packs big features and unbeatable value in a compact form factor that is simple to set up and easy to install.

MEET EASY

Compatible with virtually any video conferencing software app, MeetUp easily connects to PC, Mac[®], and Chrome[™] devices with no additional software required.

With an ultra-wide motorized lens, integrated audio, and a two-way table stand/wall mount, MeetUp reduces cross-room cabling and maximizes usable space in huddle rooms and other small spaces. Three advanced beamforming mics and a custom-tuned speaker with full duplex ensure that meetings sound as great as they look.



KEY FEATURES

All-in-one design

Compact all-in-one form factor takes up less space and minimizes cable clutter.

Plug-and-play USB connectivity

Easily connects to PC, Mac® and Chrome $^{\text{TM}}$ devices with no additional software required.

Works with most video conferencing applications

Compatible with virtually any video conferencing software app, including the ones you already use.

Certified for Business

Business-grade certifications mean you can launch your next presentation or video meeting with complete confidence.

TAA Compliant

MeetUp is TAA compliant. For applicable part numbers, visit <u>support</u>.

Razor-sharp optics

Advanced Logitech lens technology delivers remarkable video quality with superb resolution, speed, fluidity, color balance, and detail.

Motorized pan/tilt

Expand your field of view even further—up to 170°—to pan to the white board or view other areas of interest.

Ultra HD 4K image sensor

Supports multiple resolutions, including 4K (Ultra HD), 1080p (Full HD), and 720p (HD) to best support the quality offered by your application and monitor.

5x HD zoom

Zero in on close-ups of objects and whiteboard content with outstanding detail and clarity.

120° field of view

Allows everyone in the room to be seen, even those close to the camera or seated at the edges of the room.

Camera presets

Select up to three preset locations for the camera view and return to any of them with the push of a button on the remote control.

Rightsense Technologies

RightSound optimizes the human voice and enhances conversational clarity. RightSight automatically moves the camera and adjusts the zoom so no one gets left out of the picture. And RightLight helps everyone look their best on camera, regardless of lighting conditions.



Expansion microphone-ready

Optional expansion microphone increases conversational radius in larger huddle rooms.

Bluetooth® wireless technology

Connect to a *Bluetooth®* device for great-sounding audio calls.

3-microphones and custom-tuned speaker

Three beamforming microphones with noise and echo cancellation—plus a custom-tuned speaker—are specifically optimized for small conference rooms.

Multiple mounting options

Mount MeetUp wherever it works best—tabletop, wall, or monitor—for the best possible huddle room experience.

Kensington® security slot

MeetUp is provisioned with a Kensington security slot to help secure the equipment with an anti-theft lock.

Simple to manage

Monitor and manage your meeting room devices from one single platform with Logitech Sync. Plus, get business insights into how your rooms are being used.

RF remote control

Easily operate the pan/tilt/zoom functions during meetings to manually change camera angle and subject.



MEETUP ACCESSORIES



EXPANSION MIC

Logitech Expansion Mic for MeetUp provides greater flexibility for room configurations. Built-in beamforming mics are optimized for up to 4 meters (13.1 feet). To extend that range up to 5 meters (16.4 feet), add an Expansion Mic.



MEETUP MIC EXTENSION CABLE

MeetUp Mic Extension Cable adds 10 meters (32.8 ft) of reach to the mic's standard 6 meter (20 ft) cable. With 16 meters (52.5 ft) of total reach to work with, installers can route cables out of sight for a clean installation. A handy cable clip keeps the connection secure.



TV MOUNTS

Logitech TV Mount for MeetUp securely holds the MeetUp conference camera either above or below a flat-panel monitor and attaches to the industry-standard VESA mounting points available on most TVs and monitors.

GENERAL CAMERA **SPEAKER** Built-in Components: Ultra-HD camera with **Lens:** Custom Logitech lens with motorized pan/tilt Volume: 95 dB SPL at 1/2 meter peak motorized pan/tilt, integrated microphone with Zoom: 5x digital zoom Sensitivity: 86.5+/-3dB SPL at 1/2 meter 3 beamforming elements, full-range speaker, Pan: +/- 25° integrated table stand/wall mount **Distortion:** 200-300Hz < 3%, 3000 Hz -10KHz < 1% **Tilt:** +/- 15° Enclosure: All-in-one enclosure with patented antivibration suspension system **MICROPHONES** Field of View: Diagonal: 120°, Horizontal: 113°, Remote: RF remote control with three camera Vertical: 80.7° Beamforming Elements: 3 Total Room Coverage: 163° wide x 110° tall (field of Security: Kensington security slot view + pan and tilt) Pickup Range: 4 m (13.1 ft) USB 2.0 Cable: 5m (16 ft) included; customer-4K Ultra HD: Up to 3840 x 2160 pixels @ 30 fps with Sensitivity: -27 dB customer-supplied USB 3.0 cable supplied USB 3.0 cable required for 4K video Frequency Response: 90Hz-16KHz **Dimensions (H x W x D):** 104mm (4.09 in) x 400 Full HD: Up to 1920 x 1080 pixels @ 30 fps RightSound Technologies: AEC (Acoustic Echo mm (15.75 in) x 85 mm (3.27 in) **HD:** Up to 1280 x 720 pixels @ 30 fps Cancellation), VAD (Voice Activity Detector) Weight: 1.04 kg (2.3 lbs) RightLight Technologies: Low-light compensation, Noise Suppression: Al filter video noise reduction, low-light saturation Date Rate: 32KHz sampling rate optimization Add-on Mics: Supports 1 Expansion Mic for MeetUp RightSight Technologies: Automatically adjusts to expand audio coverage (not included) camera position and zoom to find and frame everyone in the room. **CERTIFICATIONS & COMPATIBILITY RIGHTSENSE TECHNOLOGIES PART NUMBERS** MeetUp: 960-001101 (TAA) Plug-and-play USB connectivity RightLight Certifications: RightSight MeetUp w/Exp Mic: 960-001201 (TAA) Certified for Skype for Business and ready for RightSound Expansion Mic: 989-000405 Teams Zoom Certified **WARRANTY** UPC: 097855131171 Tencent Certified Certified for Google Hangouts Meet Hardware MeetUp Mic Extension Cable: Standard: 2-year limited hardware warranty included Compatibility: 950-000005 UPC: 097855148940 Extended: Additional one-year and three-year RingCentral TV Mount: 939-001498 extended warranties available at the time of Pexip hardware purchase. Contact your reseller for GoToMeeting UPC: 097855133250 Microsoft Cortana® availability. Cisco Jabber[©] TV Mount XL: 939-001656 BlueJeans PACKAGE CONTENTS UPC: 097855140876 BroadSoft Vidyo MeetUp conference camera And other video conferencing, recording, and broadcasting applications that support USB Remote control cameras 5m USB 2.0 cable TAA compliant. For applicable part numbers, Power adapter visit www.logitech.com/support/meetup-taacompliance Wall mounting hardware

logitech

www.logitech.com/Meetup

Contact your reseller or contact us at www.logitech.com/vcsales

Logitech Americas

7700 Gateway Blvd. Newark, CA 94560 USA

Logitech Europe S.A.

EPFL - Quartier de l'Innovation Daniel Borel Innovation Center CH - 1015 Lausanne

Logitech Asia Pacific Ltd. Tel: 852-2821-5900 Fax: 852-2520-2230

© 2022 Logitech. Logitech, the Logitech logo and other Logitech marks are owned by Logitech and may be registered. All other trademarks are the properties of their respective owners. Logitech assumes no responsibility for any errors that may appear in this publication. Product, pricing and feature information contained herein is subject to change without notice.

Published March 2022

logitech



DATA SHEET LOGITECH TAP

Deliver one-touch join, calendar integration, instant content sharing, and a consistent experience across meeting rooms. With a sleek design, silent operation, and motion sensor for always-on readiness, Tap brings ease and convenience to video collaboration.

MEETING ROOM TOUCH CONTROLLER FOR VIDEO CONFERENCING ROOM SOLUTIONS

More than just a meeting room touch controller, Logitech Tap is what helps you achieve a consistent user experience across your entire deployment.

Boasting a spacious 10.1" touchscreen, low-profile enclosure, and multiple mounting accessories, Logitech Tap delivers a sleek appearance and convenient placement options that support a wide range of room sizes and layouts. And, with its HDMI input, content sharing is instant and effortless. Wireless content sharing is also available depending on your chosen video conferencing service.



- One-touch join: Easily start and join meetings with just one tap.
- 10.1" touch display: Spacious and responsive touch screen resists fingerprints and glare for high legibility and easy operation.
- 3 Sleek, low profile: Comfortable 14° angle allows for easy viewing, while providing an unobtrusive presence in the room.
- Always-on readiness: Built-in motion sensor saves power when idle, and powers on when a person approaches.
- 5 **Headphone jack:** Extends the host computer's wired audio capabilities to the tabletop, ideal for private conversations and for the hearing-impaired.

- **Dual cable exits:** A sturdy metal cover with removable bottom and rear exits keep cables tidy and secure.
- 7 Clean cable management: Built-in cable retention and strain relief system hides the cable entirely within its enclosure, and secures it to prevent unwanted disconnections.
- **USB accessory port:** Connect an accessory such as a USB speakerphone.
- HDMI input for content sharing: Provides instant wired content sharing when used with Google Meet™, Microsoft Teams Rooms™, and Zoom Rooms™.
- Anti-theft protection: Keep Tap securely in place by connecting a security cable to one of Tap's two Kensington lock slots, one on the bottom and another at the back.

ENTERPRISE READY



Clean Installation

Flexible cabling lets you locate Tap near participants for convenient operation while installing the host computer in a cabinet, beneath a table, or behind a display.



Multiple Mounting Options

Secure Tap flat to the table, raise the viewing angle, or mount it on the wall to conserve space, minimize cabling, and optimize the user experience.

ROOM SOLUTIONS WITH LOGITECH TAP

Easily deploy video meetings with pre-configured Logitech room solutions for Google Meet $^{\text{TM}}$ and Microsoft Teams $^{\text{TM}}$, which include everything you need - Tap, a conference camera or video bar, and PC compute - to start building meeting rooms of virtually any shape or size.











Find Your Perfect Match

Tap works seamlessly with Logitech's lineup of PC-based video bars and modular systems for small, medium, and large rooms.



Laptop Link for Meeting Rooms

Add bring-your-own-device versatility with Logitech Swytch, a convenient way to use the room's display and conference camera with any video meeting or webinar application.

SPECIFICATIONS LOGITECH TAP



Shown with Logitech Rally Bar.

| PRODUCT DIMENSIONS | PORTS & IN | NTERFACES | PACKAGE CONTENTS |
|--|---|--|---|
| Device Total Height x Width x Depth: 58 x 244 x 179 mm 2.3 x 9.6 x 7.0 in 1.25 kg (2.75 lbs) Touchscreen 10.1" diagonal screen Display Angle: 14° Resolution: 1280 x 800 Anti-fingerprint and anti-glare oleophobic coating | USB 2.0/3.0/3.1 Type C USB 2.0 Type A (for accomposition of the content of the co | essory connection) t sharing) adset Jack eaker ensor FDMI (Flat Display | Logitech Tap with Cat5e Kit Tap Touch Controller Cat5e Kit Logitech Tap Receiver Dongle Transceiver 100-240v Power Supply with International Adaptor Set 2.97 m Cat5e Cable 7.0 m Cat5e Cable HDMI 1.4a cable 2.0 m Microfiber Cloth Documentation |
| SYSTEM REQUIREMENTS | COMPATIBILITY AN | ID CERTIFICATIONS | OPTIONAL ACCESSORIES |
| Windows® 10 Chrome™ OS 80 and higher Logi CollabOS USB 2.0, 3.0, or 3.1 Type A port | Logitech Tap is certified for video conferencing r Google Meet GoToRoom Microsoft Teams Roon Pexip Room | oom solutions: | Table Mount Riser Mount Wall Mount Cat5e Kit (for Tap devices currently connected with Strong USB) Logitech Strong USB cable: 10 m, 25 m, 45 m (for Tap devices currently connected with |
| DEVICE MANAGEMENT | RingCentral Rooms Zoom Rooms | | |
| Monitor and manage with Logitech Sync remote management, Microsoft Teams Admin Center, and Zoom Device Management platforms. | See www.logitech.com/ compatibility for pendin certifications and comp DisplayLink Plug and Dis via USB as an additiona operating systems, inclu Chrome OS | g and granted atibility updates. splay™: Tap connects I display for supported | Strong USB) |
| WARRANTY | | | PART NUMBERS |
| Standard: 2-year limited hardware warranty included Extended: Additional one-year extended warranty available at the time of hardware purchase. Contact your reseller for availability. | | Logitech Tap with Cat | .5e Kit: 939-001950 |

logitech[®]

www.logitech.com/Tap

Contact your reseller or contact us at www.logitech.com/vcsales

Logitech Americas

7700 Gateway Blvd. Newark, CA 94560 USA

Logitech Europe S.A.EPFL - Quartier de l'Innovation
Daniel Borel Innovation Center CH - 1015 Lausanne

Logitech Asia Pacific Ltd. Tel: 852-2821-5900 Fax: 852-2520-2230

@ 2021 Logitech. Logitech, the Logitech logo and other Logitech marks are owned by Logitech and may be registered. All other trademarks are the properties of their respective owners. Logitech assumes no responsibility for any errors that may appear in this publication. Product, pricing and feature information contained herein is subject to change without notice.

Published September 2021





Smaller, Faster, Better, Al Ready















ASUS NUC 14 Pro delivers best-in-class performance thanks to the all-new Intel® Core™ Ultra processor family. It is the most comprehensive mini-PC built with Intel vPro® Enterprise for exceptional security, manageability, and stability. With certified Bluetooth® dongle-free connectivity and three AI engines for high throughput, low power, and fast response, ASUS NUC 14 Pro delivers robust computing capabilities. It is equipped with Wi-Fi sensing for intelligent energy efficiency, and its "tried and trusted" 4x4-inch chassis is designed for toolless access, making upgrades easy, safe, and fast.

Key Selling Points

Performance: Delivers best-in-class performance among comparable mini-PC offerings

Manageability: Most comprehensive mini-PC with Intel vPro® Enterprise for exceptional security, manageability, and stability

Al Ready: Harnesses the prowess of Intel® Core TM Ultra processors' three Al engines – GPU, NPU, and CPU – for high throughput, low power, and fast response

Wi-Fi Sensing: Takes advantage of Wi-Fi sensing to deliver instant availability while reducing power consumption

Wireless Connectivity: Delivers seamless connectivity for <u>certified Bluetooth® dongle-free</u> experiences

Customizable: Designed for toolless chassis access making upgrades easier, safer, and faster

Audience:

- Small and Medium Business Enterprises
- Retail
- Education
- Collaboration
- Remote Workers

Target Usages:

- Traditional and Smart Classrooms
- Communication File Sharing/ Virtual Meetings
- Daily Tasks/ Entertainment
- Digital Signage / Kiosk / POS









ASUS NUC 14 PRO

Mini-PC Specifications

| ^ | Image B |
|---|-----------|
| Α | illiage b |

| Marketing Name | ASUS NUC 14 Pro Mini-PC | ASUS NUC 14 Pro Mini-PC |
|-------------------------|---|---|
| Project Code | NUC14RVH | NUC14RVK |
| Photo | Image A | Image B |
| ASUS Logo | Yes | Yes |
| ASUS NUC Logo | Yes | Yes |
| Color | Black | Black |
| OS Support | Windows 11 64-bit | Windows 11 64-bit |
| СРИ | Intel® Core™ Ultra 7 Processor 165H w/ vPro, cTDP 40W Intel® Core™ Ultra 7 Processor 155H, cTDP 40W Intel® Core™ Ultra 5 Processor 135H w/ vPro, cTDP 40W Intel® Core™ Ultra 5 Processor 125H, cTDP 40W Intel® Core™ 3 Processor 100U, cTDP 25W | Intel® Core™ Ultra 7 Processor 165H w/ vPro, cTDP 40W Intel® Core™ Ultra 7 Processor 155H, cTDP 40W Intel® Core™ Ultra 5 Processor 135H w/ vPro, cTDP 40W Intel® Core™ Ultra 5 Processor 125H, cTDP 40W Intel® Core™ 3 Processor 100U, cTDP 25W |
| Chipset | Integrated | Integrated |
| | Intel® Arc™ GPU (Core Ultra)¹ | Intel® Arc™ GPU (Core Ultra)¹ |
| Graphics | Intel® Graphics (Core3) | Intel® Graphics (Core3) |
| Memory | 2 x SO-DIMM, Up to DDR5-5600, 48GB*2 | 2 x SO-DIMM, Up to DDR5-5600, 48GB*2 |
| Storage | 1 x M.2 2280 PCIe Gen4x4, supports 128GB~4TB NVMe SSD 1 x M.2 2242 PCIe Gen4x4, supports 128GB~2TB NVMe SSD 1 x SATA Port for 2.5in SSD/HDD, supports 128GB~4TB SATA drive | 1 x M.2 2280 PCIe Gen4x4, supports 128GB~4TB NVMe SS 1 x M.2 2242 PCIe Gen4x4, supports 128GB~2TB NVMe SS |
| Wireless Network LAN | Intel® Wi-Fi 6E AX211 (Gig+), Bluetooth 5.3 Intel® Ethernet Controller I226-V/LM, 2.5G ² | Intel® Wi-Fi 6E AX211 (Gig+), Bluetooth 5.3 Intel® Ethernet Controller I226-V/LM, 2.5G ² |
| Audio | N/A | N/A |
| TPM | fTPM | fTPM |
| Card Reader | None | None |
| HDMI CEC | Yes, 2 ports on back panel | Yes, 2 ports on back panel |
| Front I/O Ports | 1 x USB 3.2 Gen2x2 Type-C 2 x USB 3.2 Gen2 Type-A | 1 x USB 3.2 Gen2x2 Type-C 2 x USB 3.2 Gen2 Type-A |
| Back I/O Ports | 2 x Thunderbolt 4 Type-C w/ DisplayPort 1.4 1 x USB 3.2 Gen 2 Type-A 1 x USB 2.0 Type-A 2 x HDMI 2.1 (TMDS) 1 x RJ45 LAN 1 x DC-in | 2 x Thunderbolt 4 Type-C w/ DisplayPort 1.4 1 x USB 3.2 Gen 2 Type-A 1 x USB 2.0 Type-A 2 x HDMI 2.1 (TMDS) 1 x RJ45 LAN 1 x DC-in |
| Side I/O Ports | 1 x Kensington Lock | 1 x Kensington Lock |
| Power Supply | 19VDC, 6.32A, 120W Power Adapter (Core Ultra) 19VDC, 4.74A, 90W Power Adapter (Core3) | 19VDC, 6.32A, 120W Power Adapter (Core Ultra) 19VDC, 4.74A, 90W Power Adapter (Core3) |
| Operating Temp | 0 to 40C | 0 to 40C |
| Storage Temp | -40 to 60C | -40 to 60C |
| Humidity | 0%-92% non-condensing | 0%-92% non-condensing |
| mensions (W x D x H) | 117mm x 112mm x 54mm | 117mm x 112mm x 37mm |
| Weights | 600g (Core Ultra) 571g (Core3) | 500g (Core Ultra) 470g (Core3) |
| Accessories | AC Adapter+Power Cord ³ VESA Bracket and Screws M3 Screws for 2.5in Drive Cable Clip Safety/Caution/Regulatory Insert Warranty Card | AC Adapter+Power Cord ³ VESA Bracket and Screws Cable Clip Safety/Caution/Regulatory Insert Warranty Card |

- (1) Intel® Arc^{TM} GPU requires using 2 x SO-DIMM
- (2) Intel® Ethernet Controller I226-LM included on vPro enabled systems
- (3) Power cord included is region specific, and some SKUs do not include the power cord









Kit Specifications

| e C | | Image D |
|-----|--|---------|

| Marketing Name | ASUS NUC 14 Pro Kit | ASUS NUC 14 Pro Kit |
|---|--|---|
| Project Code | NUC14RVH-B | NUC14RVK-B |
| Photo | Image C | Image D |
| ASUS Logo | No | No |
| ASUS NUC Logo | No | No |
| Color | Black | Black |
| | Windows 11 64-bit | Windows 11 64-bit |
| OS Support | Ubuntu 24.04 LTS 64-bit | Ubuntu 24.04 LTS 64-bit |
| • | RedHat Enterprise Linux 64-bit | RedHat Enterprise Linux 64-bit |
| | Intel® Core™ Ultra 7 Processor 165H w/ vPro, cTDP 40W | Intel® Core™ Ultra 7 Processor 165H w/ vPro, cTDP 40W |
| | Intel® Core™ Ultra 7 Processor 155H, cTDP 40W | Intel® Core™ Ultra 7 Processor 155H, cTDP 40W |
| CPU | Intel® Core™ Ultra 5 Processor 135H w/ vPro, cTDP 40W | Intel® Core™ Ultra 5 Processor 135H w/ vPro, cTDP 40W |
| | Intel® Core™ Ultra 5 Processor 125H, cTDP 40W | Intel® Core™ Ultra 5 Processor 125H, cTDP 40W |
| | Intel® Core™ 3 Processor 100U, cTDP 25W | Intel® Core™ 3 Processor 100U, cTDP 25W |
| Chipset | Integrated | Integrated |
| · | Intel® Arc™ GPU (Core Ultra) ¹ | Intel® Arc™ GPU (Core Ultra)¹ |
| Graphics | Intel® Graphics (Core3) | Intel® Graphics (Core3) |
| Memory | 2 x SO-DIMM, Up to DDR5-5600, 48GB*2 | 2 x SO-DIMM, Up to DDR5-5600, 48GB*2 |
| | 1 x M.2 2280 PCIe Gen4x4, supports 128GB~4TB NVMe SSD | |
| | 1 x M.2 2242 PCIe Gen4x4, supports 128GB~2TB NVMe SSD | 1 x M.2 2280 PCIe Gen4x4, supports 128GB~4TB NVMe SS |
| Storage | 1 x SATA Port for 2.5in SSD/HDD, supports 128GB~4TB SATA | 1 x M.2 2242 PCIe Gen4x4, supports 128GB~2TB NVMe SS |
| | drive | 1 x mil 22 12 1 die dem x i, supports 12005 215 it ime de |
| Wireless Network | Intel® Wi-Fi 6E AX211 (Gig+), Bluetooth 5.3 | Intel® Wi-Fi 6E AX211 (Gig+), Bluetooth 5.3 |
| LAN | Intel® Ethernet Controller I226-V/LM, 2.5G ² | Intel® Ethernet Controller I226-V/LM, 2.5G ² |
| Audio | N/A | N/A |
| TPM | fTPM | fTPM |
| Card Reader | None | None |
| HDMI CEC | Yes, 2 ports on back panel | Yes, 2 ports on back panel |
| /0 | 1 x USB 3.2 Gen2x2 Type-C | 1 x USB 3.2 Gen2x2 Type-C |
| Front I/O Ports | 2 x USB 3.2 Gen2 Type-A | 2 x USB 3.2 Gen2 Type-A |
| | 2 x Thunderbolt 4 Type-C w/ DisplayPort 1.4 | 2 x Thunderbolt 4 Type-C w/ DisplayPort 1.4 |
| | 1 x USB 3.2 Gen 2 Type-A | 1 x USB 3.2 Gen 2 Type-A |
| D 11/0D 1 | 1 x USB 2.0 Type-A | 1 x USB 2.0 Type-A |
| Back I/O Ports | 2 x HDMI 2.1 (TMDS) | 2 x HDMI 2.1 (TMDS) |
| | 1 x RJ45 LAN | 1 x RJ45 LAN |
| | 1 x DC-in | 1 x DC-in |
| Side I/O Ports | 1 x Kensington Lock | 1 x Kensington Lock |
| Dower Cumple | 19VDC, 6.32A, 120W Power Adapter (Core Ultra) | 19VDC, 6.32A, 120W Power Adapter (Core Ultra) |
| Power Supply | 19VDC, 4.74A, 90W Power Adapter (Core3) | 19VDC, 4.74A, 90W Power Adapter (Core3) |
| Operating Temp | 0 to 40C | 0 to 40C |
| Storage Temp | -40 to 60C | -40 to 60C |
| Humidity | 0%-92% non-condensing | 0%-92% non-condensing |
| nensions (W x D x H) | 117mm x 112mm x 54mm | 117mm x 112mm x 37mm |
| | 600g (Core Ultra) | 500g (Core Ultra) |
| Weights | 571g (Core3) | 470g (Core3) |
| | AC Adapter+Power Cord ³ | |
| | VESA Bracket and Screws | AC Adapter+Power Cord ³ |
| | M3 Screws for 2.5in Drive | VESA Bracket and Screws |
| Accessories | Cable Clip | Cable Clip |
| | Safety/Caution/Regulatory Insert | Safety/Caution/Regulatory Insert |
| | ,, | Warranty Card |

⁽¹⁾ Intel® Arc^{TM} GPU requires using $2 \times SO-DIMM$

⁽²⁾ Intel® Ethernet Controller I226-LM included on vPro enabled systems

⁽³⁾ Power cord included is region specific, and some SKUs do not include the power cord







Board Specifications

Image E

| Marketing Name | ASUS NUC 14 Pro Board |
|------------------------|---|
| Project Code | NUC14RVB-M |
| Photo | Image E |
| ASUS Logo | N/A |
| ASUS NUC Logo | N/A |
| Color | N/A |
| OS Support | Windows 11 64-bit Ubuntu 24.04 LTS 64-bit RedHat Enterprise Linux 64-bit |
| СРИ | Intel® Core™ Ultra 7 Processor 165H w/ vPro, cTDP 40W Intel® Core™ Ultra 7 Processor 155H, cTDP 40W Intel® Core™ Ultra 5 Processor 135H w/ vPro, cTDP 40W Intel® Core™ Ultra 5 Processor 125H, cTDP 40W Intel® Core™ 3 Processor 100U, cTDP 25W |
| Chipset | Integrated |
| Graphics | Intel® Arc™ GPU (Core Ultra)¹ Intel® Graphics (Core3) |
| Memory | 2 x SO-DIMM, Up to DDR5-5600, 48GB*2 |
| Storage | 1 x M.2 2280 PCIe Gen4x4, supports 128GB~4TB NVMe SSD 1 x M.2 2242 PCIe Gen4x4, supports 128GB~2TB NVMe SSD 1 x SATA Power/DATA header for 2.5in SSD/HDD, supports 128GB~4TB SATA drive |
| Wireless Network | Intel® Wi-Fi 6E AX211 (Gig+), Bluetooth 5.3 |
| LAN | Intel® Ethernet Controller I226-V/LM, 2.5G ² |
| Audio | N/A |
| TPM | fTPM |
| Card Reader | None |
| HDMI CEC | Yes, 2 ports on back panel |
| Front I/O Ports | 1 x USB 3.2 Gen2x2 Type-C 2 x USB 3.2 Gen2 Type-A |
| Back I/O Ports | 2 x Thunderbolt 4 Type-C w/ DisplayPort 1.4 1 x USB 3.2 Gen 2 Type-A 1 x USB 2.0 Type-A 2 x HDMI 2.1 (TMDS) 1 x RJ45 LAN 1 x DC-in |
| Side I/O Ports | N/A |
| Power Supply | Not Included |
| Operating Temp | 0 to 50C |
| Storage Temp | -40 to 60C |
| Humidity | 0%-92% non-condensing |
| Dimensions (W x D x H) | 107mm x 102mm x 29mm |
| Weights | 227g (Core Ultra) 195g (Core3) |
| Accessories | Warranty Card Safety/Caution/Regulatory Insert |
| (1) I . I O A TWO DILL | |

- (1) Intel® Arc^{TM} GPU requires using $2 \times SO-DIMM$
- (2) Intel® Ethernet Controller I226-LM included on vPro enabled systems
- (3) Power cord included is region specific, and some SKUs do not include the power cord





Model NUC14RVH (Tall) Connections






- 1 1x USB 3.2 Gen2x2, Type-C
- 2 x USB 3.2 Gen2, Type-A
- 3 1x Power Bottom
- 4 1x DC-in

- 5 1x Thunderbolt™ 4
- 6 2 x HDMI 2.1 (TMDS)
- 7 1x 2.5Gb Ethernet
- 8 1 x USB 3.2 Gen 2, Type-A
- 9 1x Thunderbolt™ 4
- 10 1 x USB 2.0, Type-A
- 11 1x Kensington Lock (Side Port)
- 12 1x Security mechanism for power cable

Model NUC14RVK (Slim) Connections



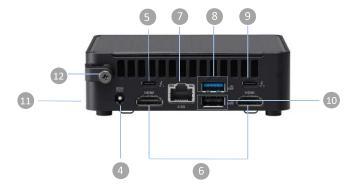

- 1 x USB 3.2 Gen2x2, Type-C
- 2 x USB 3.2 Gen2, Type-A
- 3 1x Power Bottom
- 4 1x DC-in

- 5 1x Thunderbolt™ 4
- 6 2 x HDMI 2.1 (TMDS)
- 7 1x 2.5Gb Ethernet
- 8 1x USB 3.2 Gen 2, Type-A
- 9 1x Thunderbolt™ 4
- 1x USB 2.0, Type-A
- 11 1x Kensington Lock (Side Port)
- 1x Security mechanism for power cable





What's in the box





NUC 14 PRO



Power Adapter 90 / 120 W



Inserts



Power Cord*



VESA bracket and Screws

NOTE:

- The most up-to-date and accurate product specifications are available on www.asus.com for download.
- Product and accessory images are for illustrative purposes only. The actual appearance and specifications may vary depending on the model.
- \cdot *The bundled power adapter may vary depending on the model and the country (or region) of sale.
- Some bundled accessories may vary depending on the model. For details on these accessories, refer to their respective user manuals.
- If the device or its components fail or malfunction during normal and proper use within the warranty period, bring the warranty card to the ASUS Service Center for replacement of the defective components.