



DATASHEET

RALLY BAR HUDDLE

VIDEO ENABLE HUDDLE AND SMALL ROOMS. ALL-IN-ONE VIDEO CONFERENCING AT THE TOUCH OF A BUTTON.

ALL-IN-ONE VIDEO BAR FOR HUDDLE AND SMALL ROOMS


Designed to deliver video meetings with ease, Rally Bar Huddle is quick to set up in person or remotely, simple to manage, and easy to integrate with your existing video conferencing solutions through CollabOS.

Rally Bar Huddle works with most platforms you use to connect hybrid teams, ensuring an effortless experience from the home to the office, and everywhere in between.

Combine Rally Bar Huddle with Tap IP and Tap Scheduler to make it easy to schedule, join, and participate in video meetings.

EVERYONE IS SEEN AND HEARD CLEARLY

AI video intelligence, advanced sound pickup, noise suppression, and ongoing software improvements provide a clear and natural meeting experience for remote workers.

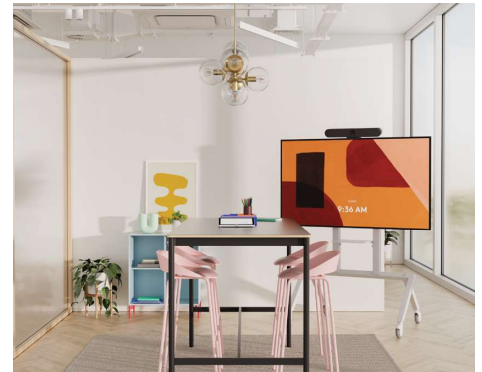

WORKS WITH LEADING VIDEO PLATFORMS

Rally Bar Huddle works with most platforms you use to connect hybrid teams, ensuring an effortless experience from the home to the office, and everywhere in between.



QUICK TO SET UP, EASY TO MANAGE



Designed to deliver video meetings with ease, Rally Bar Huddle is quick to set up, simple to manage, and easy to integrate with Tap IP through CollabOS. Plus, use the included Multi Mount to mount Rally Bar Huddle one of three ways; on the wall, on the table, or above the display.

Plus, use Rally Bar Huddle as a meeting room appliance, in USB mode connected to a meeting room PC, or connect via laptop.



PC




APPLIANCE



BYOD



DIMENSIONS	SYSTEM REQUIREMENTS	PACKAGE CONTENTS	WARRANTY INFORMATION
Width: 549.6 mm (21.6 in) Height: 78.9 mm (3.1 in) Depth: 76.0 mm (3.0 in) Weight: 3.9 lbs (1.8 kg)	Internet Connection: Wired or wireless USB Mode: Windows® 11, Windows 10, the two most recent versions of macOS Appliance Mode: Room solution software license (not included)	Rally Bar Huddle Multi-Mount Power supply AC power cord HDMI cable USB cable	Standard: 2-year limited hardware warranty included. Extended: Additional one-year and three-year extended warranties available at the time of hardware purchase. Contact your reseller for availability.
TECHNICAL SPECIFICATIONS			
<p>Certifications and Compatibility:</p> <p>For the latest information on certification and compatibility, see prosupport.logi.com/hc/en-us/articles/1500001344641.</p> <p>General Specifications:</p> <p>Built-in Components: 6 DMIC microphone array, digital PTZ camera, 1 full range ported speaker, cable management & retention system, Multi Mount, integrated motorized privacy shutter, Logitech CollabOS platform</p> <p>Enclosure: All-in-one enclosure with field replaceable front cover</p> <p>Device Management: Logitech Sync</p> <p>Displays Supported: 1 (2nd display support is coming soon)</p> <p>Display Resolution: 1080p</p> <p>Network Protocol Support: IPv4, IPv6</p> <p>Proxy Support: IP based Proxy, FQDN based Proxy, Proxy using PAC file</p> <p>Camera:</p> <p>Digital Pan: ±48° at 4x zoom</p> <p>Digital Tilt: ±32° at 4x zoom</p> <p>Zoom: 4X HD digital zoom</p> <p>Diagonal Field of View: 120°</p> <p>Horizontal Field of View: 113°</p> <p>Vertical Field of View: 80°</p> <p>Resolution: 4k</p>	<p>Speakers:</p> <p>Driver: 55 mm with bass reflex enclosure and patented suspension design</p> <p>Sensitivity: 83 dB SPL @1W +/-2dB @ 1 meter</p> <p>Rated Power: 8W</p> <p>THD at 1W, 1kHz: <2%</p> <p>Speaker Sampling Rate: 48KHz</p> <p>Impedance: 4 Ohms</p> <p>Microphones:</p> <p>Frequency Response: 90Hz–16kHz</p> <p>Sensitivity: -36dBFS +/-1 dB @ 1Pa</p> <p>Microphone data rate output: 48 kHz</p> <p>Pickup Range: Up to 23 ft (7m)</p> <p>Beamforming Elements: Six omnidirectional digital MEMS microphones forming five adaptive acoustic broadside beams</p> <p>Audio processing: AEC (Acoustic Echo Cancellation), VAD (Voice Activity Detector)</p> <p>Noise suppression: AI based de-noising algorithm</p> <p>Interfaces:</p> <p>HDMI Out: 1</p> <p>HDMI In: 1</p> <p>USB: 1x Type A USB 3.1, 1x Type C USB 3.1</p> <p>Network: 10/100/1G Ethernet</p> <p>WiFi: 802.11a/b/g/n/ac</p> <p>Bluetooth: Bluetooth® Low Energy</p>	<p>Power and Cables:</p> <p>Power supply: Auto-sensing</p> <p>Operating Voltage/Power: 100-240V, 19V, 2.1A</p> <p>Power Supply Dimensions: 4.48 in (114 mm) x 1.85 in (47 mm) x 1.27 in (32.3 mm)</p> <p>DC Cable: 5 ft (1.5 m)</p> <p>AC Cable: 4.9 ft (1 m)</p> <p>HDMI 1.4 Cable: 6.5 ft (2 m)</p> <p>USB A to USB C 3.0 Cable: 7.2 ft (2.2 m)</p> <p>Environmental:</p> <p>Operating Temperature: 0 to 40°C</p> <p>Storage Temperature: -25 to 70°C</p> <p>Humidity: 10 to 90%</p> <p>Security:</p> <p>File Based Encryption: AES-128</p> <p>Data Encryption: Symmetric Keys, PKI</p> <p>Device Identity: Protected by device attestation</p> <p>Device Access: Authenticated using API</p> <p>Key Protection: Arm TrustZone, RPMP</p> <p>Accessories:</p> <p>Covers: Rally Bar Huddle Front Cover-Cleanable, Off-White Fabric</p> <p>Mounts: Wall Mount for Video Bars, TV Mount for Video Bars</p> <p>Touch Controller: Logitech Tap (coming soon) and Tap IP</p>	
			PART NUMBER
			960-001485

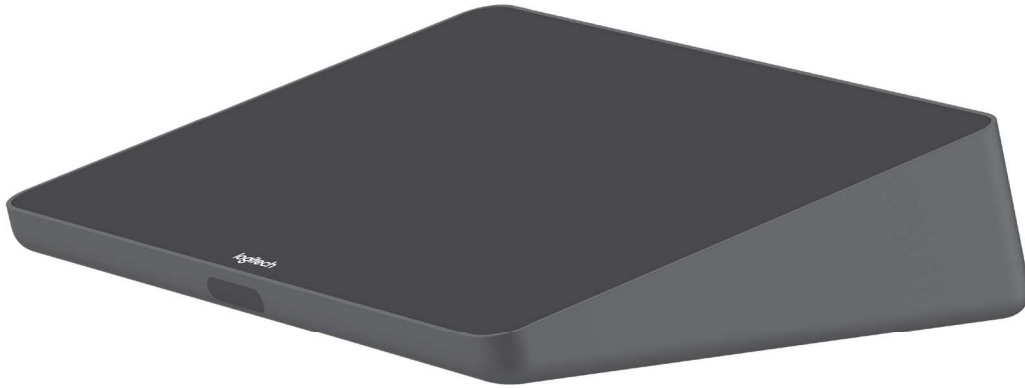

DATA SHEET **LOGITECH TAP**

Deliver one-touch join, calendar integration, instant content sharing, and a consistent experience across meeting rooms. With a sleek design, silent operation, and motion sensor for always-on readiness, Tap brings ease and convenience to video collaboration.

MEETING ROOM TOUCH CONTROLLER FOR VIDEO CONFERENCING ROOM SOLUTIONS

More than just a meeting room touch controller, Logitech Tap is what helps you achieve a consistent user experience across your entire deployment.

Boasting a spacious 10.1" touchscreen, low-profile enclosure, and multiple mounting accessories, Logitech Tap delivers a sleek appearance and convenient placement options that support a wide range of room sizes and layouts. And, with its HDMI input, content sharing is instant and effortless. Wireless content sharing is also available depending on your chosen video conferencing service.



- 1 One-touch join:** Easily start and join meetings with just one tap.
- 2 10.1" touch display:** Spacious and responsive touch screen resists fingerprints and glare for high legibility and easy operation.
- 3 Sleek, low profile:** Comfortable 14° angle allows for easy viewing, while providing an unobtrusive presence in the room.
- 4 Always-on readiness:** Built-in motion sensor saves power when idle, and powers on when a person approaches.
- 5 Headphone jack:** Extends the host computer's wired audio capabilities to the tabletop, ideal for private conversations and for the hearing-impaired.
- 6 Dual cable exits:** A sturdy metal cover with removable bottom and rear exits keep cables tidy and secure.
- 7 Clean cable management:** Built-in cable retention and strain relief system hides the cable entirely within its enclosure, and secures it to prevent unwanted disconnections.
- 8 USB accessory port:** Connect an accessory such as a USB speakerphone.
- 9 HDMI input for content sharing:** Provides instant wired content sharing when used with Google Meet™, Microsoft Teams Rooms™, and Zoom Rooms™.
- 10 Anti-theft protection:** Keep Tap securely in place by connecting a security cable to one of Tap's two Kensington lock slots, one on the bottom and another at the back.

ENTERPRISE READY



Clean Installation

Flexible cabling lets you locate Tap near participants for convenient operation while installing the host computer in a cabinet, beneath a table, or behind a display.





Multiple Mounting Options

Secure Tap flat to the table, raise the viewing angle, or mount it on the wall to conserve space, minimize cabling, and optimize the user experience.

ROOM SOLUTIONS WITH LOGITECH TAP

Easily deploy video meetings with pre-configured Logitech room solutions for Google Meet™ and Microsoft Teams™, which include everything you need - Tap, a conference camera or video bar, and PC compute - to start building meeting rooms of virtually any shape or size.



Find Your Perfect Match

Tap works seamlessly with Logitech's lineup of PC-based video bars and modular systems for small, medium, and large rooms.



Laptop Link for Meeting Rooms

Add bring-your-own-device versatility with Logitech Swytch, a convenient way to use the room's display and conference camera with any video meeting or webinar application.



Shown with Logitech Rally Bar.

PRODUCT DIMENSIONS		PORTS & INTERFACES	PACKAGE CONTENTS
Device Total Height x Width x Depth: 58 x 244 x 179 mm 2.3 x 9.6 x 7.0 in 1.25 kg (2.75 lbs)		USB 2.0/3.0/3.1 Type C (to PC) USB 2.0 Type A (for accessory connection) HDMI input (for content sharing) 3.5mm/1/8 " 4 pole Headset Jack Integrated ultrasonic speaker Integrated PIR Motion Sensor 100mm x 100mm VESA FDMI (Flat Display Mounting Interface) Kensington Lock Slots (2)	Logitech Tap with Cat5e Kit Tap Touch Controller Cat5e Kit Logitech Tap Receiver Dongle Transceiver 100-240v Power Supply with International Adaptor Set 2.97 m Cat5e Cable 7.0 m Cat5e Cable HDMI 1.4a cable 2.0 m Microfiber Cloth Documentation
Touchscreen 10.1" diagonal screen Display Angle: 14° Resolution: 1280 x 800 Anti-fingerprint and anti-glare oleophobic coating			
SYSTEM REQUIREMENTS	COMPATIBILITY AND CERTIFICATIONS		OPTIONAL ACCESSORIES
Windows® 10 Chrome™ OS 80 and higher Logi CollabOS USB 2.0, 3.0, or 3.1 Type A port	Logitech Tap is certified as a touch controller for video conferencing room solutions: Google Meet GoToRoom Microsoft Teams Rooms Pexip Room RingCentral Rooms Zoom Rooms See www.logitech.com/support/tap-compatibility for pending and granted certifications and compatibility updates. DisplayLink Plug and Display™: Tap connects via USB as an additional display for supported operating systems, including Windows 10 and Chrome OS		Table Mount Riser Mount Wall Mount Cat5e Kit (for Tap devices currently connected with Strong USB) Logitech Strong USB cable: 10 m, 25 m, 45 m (for Tap devices currently connected with Strong USB)
DEVICE MANAGEMENT			
Monitor and manage with Logitech Sync remote management, Microsoft Teams Admin Center, and Zoom Device Management platforms.			
WARRANTY		PART NUMBERS	
Standard: 2-year limited hardware warranty included Extended: Additional one-year extended warranty available at the time of hardware purchase. Contact your reseller for availability.		Logitech Tap with Cat5e Kit: 939-001950	



www.logitech.com/Tap

Contact your reseller
or contact us at
www.logitech.com/vcsales

Logitech Americas
7700 Gateway Blvd.
Newark, CA 94560 USA

Logitech Europe S.A.
EPFL - Quartier de l'Innovation
Daniel Borel Innovation Center
CH - 1015 Lausanne

Logitech Asia Pacific Ltd.
Tel : 852-2821-5900
Fax : 852-2520-2230

© 2021 Logitech. Logitech, the Logitech logo and other Logitech marks are owned by Logitech and may be registered. All other trademarks are the properties of their respective owners. Logitech assumes no responsibility for any errors that may appear in this publication. Product, pricing and feature information contained herein is subject to change without notice.

Published September 2021

ASUS NUC 14 PRO

Smaller, Faster, Better, AI Ready



ASUS NUC 14 Pro delivers best-in-class performance thanks to the all-new Intel® Core™ Ultra processor family. It is the most comprehensive mini-PC built with Intel vPro® Enterprise for exceptional security, manageability, and stability. With certified Bluetooth® dongle-free connectivity and three AI engines for high throughput, low power, and fast response, ASUS NUC 14 Pro delivers robust computing capabilities. It is equipped with Wi-Fi sensing for intelligent energy efficiency, and its “tried and trusted” 4x4-inch chassis is designed for toolless access, making upgrades easy, safe, and fast.

Key Selling Points

Performance: Delivers best-in-class performance among comparable mini-PC offerings

Manageability: Most comprehensive mini-PC with Intel vPro® Enterprise for exceptional security, manageability, and stability

AI Ready: Harnesses the prowess of Intel® Core™ Ultra processors’ three AI engines – GPU, NPU, and CPU – for high throughput, low power, and fast response

Wi-Fi Sensing: Takes advantage of Wi-Fi sensing to deliver instant availability while reducing power consumption

Wireless Connectivity: Delivers seamless connectivity for [certified Bluetooth® dongle-free experiences](#)

Customizable: Designed for toolless chassis access making upgrades easier, safer, and faster

Audience:

- Small and Medium Business Enterprises
- Retail
- Education
- Collaboration
- Remote Workers

Target Usages:

- Traditional and Smart Classrooms
- Communication File Sharing/ Virtual Meetings
- Daily Tasks/ Entertainment
- Digital Signage / Kiosk / POS

ASUS NUC 14 PRO

Mini-PC Specifications



Image A



Image B

Marketing Name	ASUS NUC 14 Pro Mini-PC		ASUS NUC 14 Pro Mini-PC
Project Code	NUC14RVH		NUC14RVK
Photo	Image A		Image B
ASUS Logo	Yes		Yes
ASUS NUC Logo	Yes		Yes
Color	Black		Black
OS Support	Windows 11 64-bit		Windows 11 64-bit
CPU	Intel® Core™ Ultra 7 Processor 165H w/ vPro, cTDP 40W Intel® Core™ Ultra 7 Processor 155H, cTDP 40W Intel® Core™ Ultra 5 Processor 135H w/ vPro, cTDP 40W Intel® Core™ Ultra 5 Processor 125H, cTDP 40W Intel® Core™ 3 Processor 100U, cTDP 25W		Intel® Core™ Ultra 7 Processor 165H w/ vPro, cTDP 40W Intel® Core™ Ultra 7 Processor 155H, cTDP 40W Intel® Core™ Ultra 5 Processor 135H w/ vPro, cTDP 40W Intel® Core™ Ultra 5 Processor 125H, cTDP 40W Intel® Core™ 3 Processor 100U, cTDP 25W
Chipset	Integrated		Integrated
Graphics	Intel® Arc™ GPU (Core Ultra) ¹ Intel® Graphics (Core3)		Intel® Arc™ GPU (Core Ultra) ¹ Intel® Graphics (Core3)
Memory	2 x SO-DIMM, Up to DDR5-5600, 48GB*2		2 x SO-DIMM, Up to DDR5-5600, 48GB*2
Storage	1 x M.2 2280 PCIe Gen4x4, supports 128GB~4TB NVMe SSD 1 x M.2 2242 PCIe Gen4x4, supports 128GB~2TB NVMe SSD 1 x SATA Port for 2.5in SSD/HDD, supports 128GB~4TB SATA drive		1 x M.2 2280 PCIe Gen4x4, supports 128GB~4TB NVMe SSD 1 x M.2 2242 PCIe Gen4x4, supports 128GB~2TB NVMe SSD
Wireless Network	Intel® Wi-Fi 6E AX211 (Gig+), Bluetooth 5.3		Intel® Wi-Fi 6E AX211 (Gig+), Bluetooth 5.3
LAN	Intel® Ethernet Controller I226-V/LM, 2.5G ²		Intel® Ethernet Controller I226-V/LM, 2.5G ²
Audio	N/A		N/A
TPM	fTPM		fTPM
Card Reader	None		None
HDMI CEC	Yes, 2 ports on back panel		Yes, 2 ports on back panel
Front I/O Ports	1 x USB 3.2 Gen2x2 Type-C 2 x USB 3.2 Gen2 Type-A		1 x USB 3.2 Gen2x2 Type-C 2 x USB 3.2 Gen2 Type-A
Back I/O Ports	2 x Thunderbolt 4 Type-C w/ DisplayPort 1.4 1 x USB 3.2 Gen 2 Type-A 1 x USB 2.0 Type-A 2 x HDMI 2.1 (TMDS) 1 x RJ45 LAN 1 x DC-in		2 x Thunderbolt 4 Type-C w/ DisplayPort 1.4 1 x USB 3.2 Gen 2 Type-A 1 x USB 2.0 Type-A 2 x HDMI 2.1 (TMDS) 1 x RJ45 LAN 1 x DC-in
Side I/O Ports	1 x Kensington Lock		1 x Kensington Lock
Power Supply	19VDC, 6.32A, 120W Power Adapter (Core Ultra) 19VDC, 4.74A, 90W Power Adapter (Core3)		19VDC, 6.32A, 120W Power Adapter (Core Ultra) 19VDC, 4.74A, 90W Power Adapter (Core3)
Operating Temp	0 to 40C		0 to 40C
Storage Temp	-40 to 60C		-40 to 60C
Humidity	0%-92% non-condensing		0%-92% non-condensing
Dimensions (W x D x H)	117mm x 112mm x 54mm		117mm x 112mm x 37mm
Weights	600g (Core Ultra) 571g (Core3)		500g (Core Ultra) 470g (Core3)
Accessories	AC Adapter+Power Cord ³ VESA Bracket and Screws M3 Screws for 2.5in Drive Cable Clip Safety/Caution/Regulatory Insert Warranty Card		AC Adapter+Power Cord ³ VESA Bracket and Screws Cable Clip Safety/Caution/Regulatory Insert Warranty Card

(1) Intel® Arc™ GPU requires using 2 x SO-DIMM

(2) Intel® Ethernet Controller I226-LM included on vPro enabled systems

(3) Power cord included is region specific, and some SKUs do not include the power cord

ASUS NUC 14 PRO

Kit Specifications



Image C



Image D

Marketing Name	ASUS NUC 14 Pro Kit	
Project Code	NUC14RVH-B	
Photo	Image C	Image D
ASUS Logo	No	No
ASUS NUC Logo	No	No
Color	Black	Black
OS Support	Windows 11 64-bit	Windows 11 64-bit
	Ubuntu 24.04 LTS 64-bit	Ubuntu 24.04 LTS 64-bit
	RedHat Enterprise Linux 64-bit	RedHat Enterprise Linux 64-bit
CPU	Intel® Core™ Ultra 7 Processor 165H w/ vPro, cTDP 40W	Intel® Core™ Ultra 7 Processor 165H w/ vPro, cTDP 40W
	Intel® Core™ Ultra 7 Processor 155H, cTDP 40W	Intel® Core™ Ultra 7 Processor 155H, cTDP 40W
	Intel® Core™ Ultra 5 Processor 135H w/ vPro, cTDP 40W	Intel® Core™ Ultra 5 Processor 135H w/ vPro, cTDP 40W
	Intel® Core™ Ultra 5 Processor 125H, cTDP 40W	Intel® Core™ Ultra 5 Processor 125H, cTDP 40W
	Intel® Core™ 3 Processor 100U, cTDP 25W	Intel® Core™ 3 Processor 100U, cTDP 25W
Chipset	Integrated	Integrated
Graphics	Intel® Arc™ GPU (Core Ultra) ¹	Intel® Arc™ GPU (Core Ultra) ¹
	Intel® Graphics (Core3)	Intel® Graphics (Core3)
Memory	2 x SO-DIMM, Up to DDR5-5600, 48GB*2	2 x SO-DIMM, Up to DDR5-5600, 48GB*2
Storage	1 x M.2 2280 PCIe Gen4x4, supports 128GB~4TB NVMe SSD	1 x M.2 2280 PCIe Gen4x4, supports 128GB~4TB NVMe SSD
	1 x M.2 2242 PCIe Gen4x4, supports 128GB~2TB NVMe SSD	1 x M.2 2242 PCIe Gen4x4, supports 128GB~2TB NVMe SSD
	1 x SATA Port for 2.5in SSD/HDD, supports 128GB~4TB SATA drive	
Wireless Network	Intel® Wi-Fi 6E AX211 (Gig+), Bluetooth 5.3	Intel® Wi-Fi 6E AX211 (Gig+), Bluetooth 5.3
LAN	Intel® Ethernet Controller I226-V/LM, 2.5G ²	Intel® Ethernet Controller I226-V/LM, 2.5G ²
Audio	N/A	N/A
TPM	fTPM	fTPM
Card Reader	None	None
HDMI CEC	Yes, 2 ports on back panel	Yes, 2 ports on back panel
Front I/O Ports	1 x USB 3.2 Gen2x2 Type-C	1 x USB 3.2 Gen2x2 Type-C
	2 x USB 3.2 Gen2 Type-A	2 x USB 3.2 Gen2 Type-A
Back I/O Ports	2 x Thunderbolt 4 Type-C w/ DisplayPort 1.4	2 x Thunderbolt 4 Type-C w/ DisplayPort 1.4
	1 x USB 3.2 Gen 2 Type-A	1 x USB 3.2 Gen 2 Type-A
	1 x USB 2.0 Type-A	1 x USB 2.0 Type-A
	2 x HDMI 2.1 (TMDS)	2 x HDMI 2.1 (TMDS)
	1 x RJ45 LAN	1 x RJ45 LAN
Side I/O Ports	1 x Kensington Lock	1 x Kensington Lock
	19VDC, 6.32A, 120W Power Adapter (Core Ultra)	19VDC, 6.32A, 120W Power Adapter (Core Ultra)
Power Supply	19VDC, 4.74A, 90W Power Adapter (Core3)	19VDC, 4.74A, 90W Power Adapter (Core3)
Operating Temp	0 to 40C	0 to 40C
Storage Temp	-40 to 60C	-40 to 60C
Humidity	0%-92% non-condensing	0%-92% non-condensing
Dimensions (W x D x H)	117mm x 112mm x 54mm	117mm x 112mm x 37mm
Weights	600g (Core Ultra)	500g (Core Ultra)
	571g (Core3)	470g (Core3)
Accessories	AC Adapter+Power Cord ³	AC Adapter+Power Cord ³
	VESA Bracket and Screws	VESA Bracket and Screws
	M3 Screws for 2.5in Drive	Cable Clip
	Cable Clip	Safety/Caution/Regulatory Insert
	Safety/Caution/Regulatory Insert	Warranty Card
	Warranty Card	

(1) Intel® Arc™ GPU requires using 2 x SO-DIMM

(2) Intel® Ethernet Controller I226-LM included on vPro enabled systems

(3) Power cord included is region specific, and some SKUs do not include the power cord



Image E

ASUS NUC 14 PRO

Board Specifications

Marketing Name	ASUS NUC 14 Pro Board
Project Code	NUC14RVB-M
Photo	Image E
ASUS Logo	N/A
ASUS NUC Logo	N/A
Color	N/A
OS Support	Windows 11 64-bit Ubuntu 24.04 LTS 64-bit RedHat Enterprise Linux 64-bit
CPU	Intel® Core™ Ultra 7 Processor 165H w/ vPro, cTDP 40W Intel® Core™ Ultra 7 Processor 155H, cTDP 40W Intel® Core™ Ultra 5 Processor 135H w/ vPro, cTDP 40W Intel® Core™ Ultra 5 Processor 125H, cTDP 40W Intel® Core™ 3 Processor 100U, cTDP 25W
Chipset	Integrated
Graphics	Intel® Arc™ GPU (Core Ultra) ¹ Intel® Graphics (Core3)
Memory	2 x SO-DIMM, Up to DDR5-5600, 48GB*2
Storage	1 x M.2 2280 PCIe Gen4x4, supports 128GB~4TB NVMe SSD 1 x M.2 2242 PCIe Gen4x4, supports 128GB~2TB NVMe SSD 1 x SATA Power/DATA header for 2.5in SSD/HDD, supports 128GB~4TB SATA drive
Wireless Network	Intel® Wi-Fi 6E AX211 (Gig+), Bluetooth 5.3
LAN	Intel® Ethernet Controller I226-V/LM, 2.5G ²
Audio	N/A
TPM	fTPM
Card Reader	None
HDMI CEC	Yes, 2 ports on back panel
Front I/O Ports	1 x USB 3.2 Gen2x2 Type-C 2 x USB 3.2 Gen2 Type-A
Back I/O Ports	2 x Thunderbolt 4 Type-C w/ DisplayPort 1.4 1 x USB 3.2 Gen 2 Type-A 1 x USB 2.0 Type-A 2 x HDMI 2.1 (TMDS) 1 x RJ45 LAN 1 x DC-in
Side I/O Ports	N/A
Power Supply	Not Included
Operating Temp	0 to 50C
Storage Temp	-40 to 60C
Humidity	0%-92% non-condensing
Dimensions (W x D x H)	107mm x 102mm x 29mm
Weights	227g (Core Ultra) 195g (Core3)
Accessories	Warranty Card Safety/Caution/Regulatory Insert


(1) Intel® Arc™ GPU requires using 2 x SO-DIMM

(2) Intel® Ethernet Controller I226-LM included on vPro enabled systems

(3) Power cord included is region specific, and some SKUs do not include the power cord

ASUS NUC 14 PRO

Model NUC14RVH (Tall) Connections

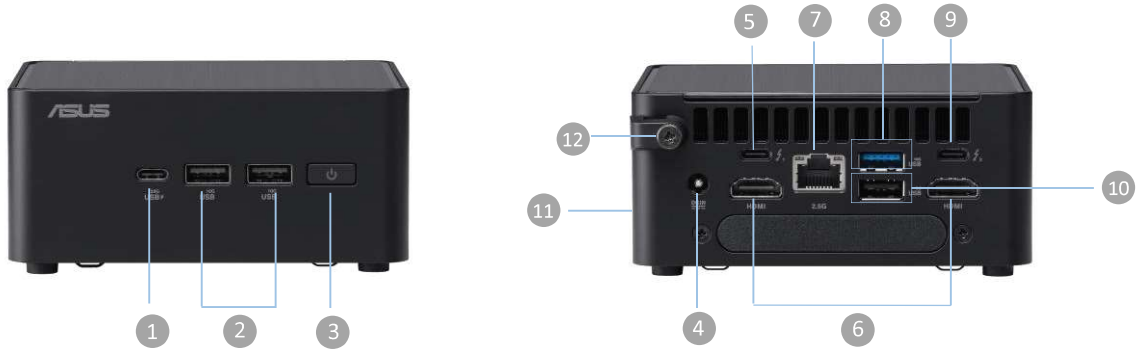


- 1 1x USB 3.2 Gen2x2, Type-C
- 2 2x USB 3.2 Gen2, Type-A
- 3 1x Power Bottom
- 4 1x DC-in

- 5 1x Thunderbolt™ 4
- 6 2x HDMI 2.1 (TMDS)
- 7 1x 2.5Gb Ethernet
- 8 1x USB 3.2 Gen 2, Type-A

- 9 1x Thunderbolt™ 4
- 10 1x USB 2.0, Type-A
- 11 1x Kensington Lock (Side Port)
- 12 1x Security mechanism for power cable

Model NUC14RVK (Slim) Connections

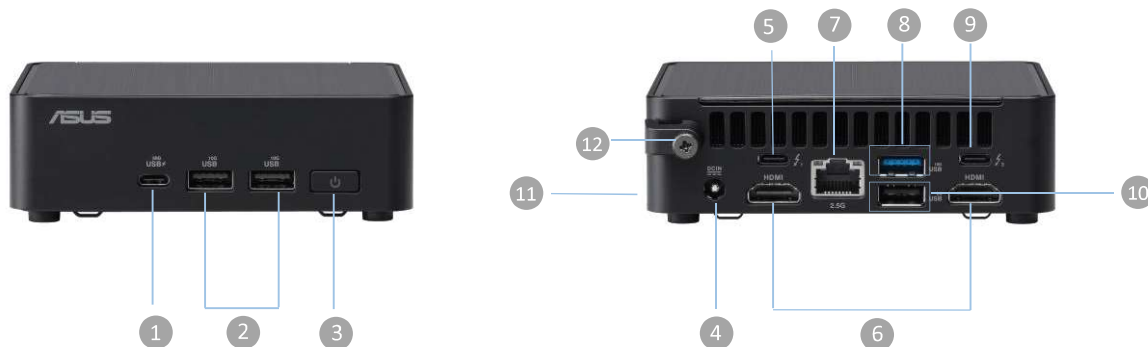

- 1 1x USB 3.2 Gen2x2, Type-C
- 2 2x USB 3.2 Gen2, Type-A
- 3 1x Power Bottom
- 4 1x DC-in

- 5 1x Thunderbolt™ 4
- 6 2x HDMI 2.1 (TMDS)
- 7 1x 2.5Gb Ethernet
- 8 1x USB 3.2 Gen 2, Type-A

- 9 1x Thunderbolt™ 4
- 10 1x USB 2.0, Type-A
- 11 1x Kensington Lock (Side Port)
- 12 1x Security mechanism for power cable

ASUS NUC 14 PRO


What's in the box



Or



NUC 14 PRO




Power Adapter


90 / 120 W



Inserts



Power Cord*



VESA bracket and
Screws

NOTE:

- The most up-to-date and accurate product specifications are available on www.asus.com for download.
- Product and accessory images are for illustrative purposes only. The actual appearance and specifications may vary depending on the model.
- *The bundled power adapter may vary depending on the model and the country (or region) of sale.
- Some bundled accessories may vary depending on the model. For details on these accessories, refer to their respective user manuals.
- If the device or its components fail or malfunction during normal and proper use within the warranty period, bring the warranty card to the ASUS Service Center for replacement of the defective components.