

logitech®

SMARTER MEETINGS AUTOMATICALLY.



Logitech Rally

Logitech® Rally offers an Ultra-HD imaging system, delivering brilliantly sharp video, outstanding color, and exceptional optical accuracy at resolutions up to 4K. The modular audio system brings crisp, clear audio and unmatched voice clarity to the table.

Rally comes standard with one speaker and one mic pod for medium and large sized meeting rooms. For larger spaces with 14 participants or more, Rally Plus offers two mic pods and two speakers for greater versatility out of the box.

Rally's modular audio components mean that speakers and mic pods can be placed wherever they are needed, achieving full audio coverage in your meeting space. Rally supports up to seven mic pods in total, helping you create the perfect audio configuration for your space.

Rally features RightSense™ proactive technologies, which make better meetings easy and automatic. RightSight™ auto-frames participants no matter their distance from the lens, RightLight™ prioritizes faces over environment to render natural-looking

skin tones, while RightSound™ enhances vocal clarity by suppressing background noise, auto-leveling voices, and focusing on active speakers. RightSense is compatible with most any video conferencing application that works with USB devices, including Google® Hangouts™ Meet, Microsoft® Skype® for Business and Teams, and Zoom.

Elegantly designed with premium finishes, thoughtful cable management, and modular audio, Rally integrates beautifully into any room design.

FEATURES & BENEFITS

VIDEO

Exceptional Video Quality

With an Ultra-HD imaging system, Rally delivers brilliantly sharp video, outstanding color, and exceptional optical accuracy at resolutions up to 4K.

Adaptive Pan, Tilt and Zoom

The smooth PTZ motor adjusts pan and tilt speed with the amount of zoom. The result: Faster camera movement when zoomed out for quick framing and slower camera movement when zoomed in for more control.

Sleek Industrial Design

The premium PTZ camera is elegantly finished in matte black and slate gray metal trim, complemented by sleekly designed audio components and accessories that look great in any room.

AUDIO

Advanced Modular Audio

Rally delivers sound that's natural, crisp, and highly intelligible. Exquisitely sensitive Mic Pods ensure that everyone in the meeting can be clearly heard while stand-alone speakers fill larger rooms with rich, life-like sound.

Front-of-Room Audio

Rally speakers are designed for placement at the front of the room. With mic pods on the table and speakers at the display, voices and video come from a natural direction — and never from behind you — so conversations feel more natural and lifelike.

Up to 7 Mic Pods

For large meeting rooms, add Rally Mic Pods to expand audio coverage and provide convenient access to mute controls. Each pod adds coverage for six additional participants, perfect for equipping large meeting spaces and boardrooms.

CONNECTIVITY & USAGE

Smart Cabling and Content Sharing

With a Display Hub and Table Hub to minimize cross-room cabling, Rally components and the meeting computer remain securely out of sight.

Loud and Clear

The built-in amplifiers in Rally Display Hub can power up to two Rally Speakers, providing rich sound even in larger rooms.

Optional Flexible Mic Pod Cabling

Rally Mic Pod Hub makes it easy to minimize cross-table cabling with three connectors for Rally Mic Pods or additional Mic Pod Hubs, helping participants reposition individual pods or to bring mute control within easy reach.

Optional Mounting Kit

Add the Rally Mounting Kit to streamline installation of each component with custom brackets and mounting hardware.

RIGHTSENSE TECHNOLOGIES AND DESIGN INNOVATIONS

Integrated Logitech RightSense technologies, built into Rally, automate a better user experience. RightSight perfectly auto-frames participants no matter their distance from the lens. RightLight prioritizes faces over environment to render natural-looking skin tones while RightSound enhances vocal clarity by suppressing background noise, auto-leveling voices, and focusing on active speakers to support better meetings.

RightSight

Logitech RightSight camera control technology automatically moves the lens and adjusts the zoom so no one gets left out of the picture. RightSight detects human figures, not just faces, to ensure that meeting participants remain in view and optimally framed on-screen.

RightLight


Logitech RightLight with Wide Dynamic Range (WDR) helps everyone look their best on camera, regardless of lighting conditions. RightLight reduces video noise, optimizes light balance, and fine-tunes color and saturation for natural results across all skin tones.

RightSound

Logitech RightSound is a suite of audio processing technologies and design innovations that deliver enterprise-class sound to video conferences. Optimized for the human voice, RightSound reduces unwanted vibrations and noise, and zeroes in on the active speaker to convey their every word with remarkable clarity.


ROOM SETUP DIAGRAMS

Rally

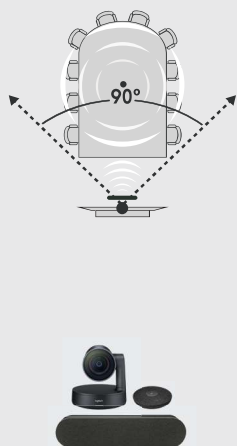


UP TO 10 SEATS

Rally Plus

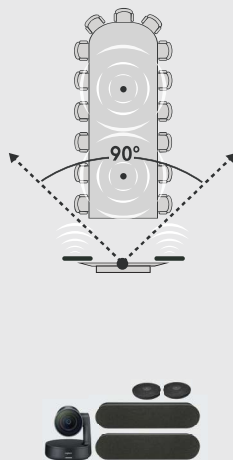

UP TO 16 SEATS

Rally Plus

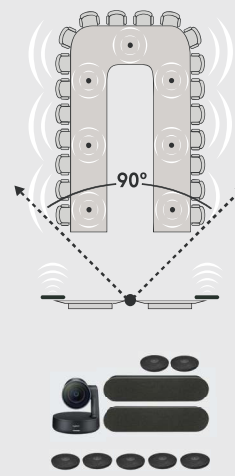

OPTIONAL MIC PODS
1 OPTIONAL MIC = 6 ADDITIONAL SEATS


UP TO 46 SEATS

ACCESSORIES



RALLY SPEAKER

Rally supports up to 2 Rally Speakers for larger rooms

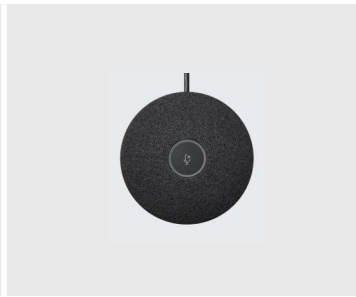

RALLY MIC POD

Rally supports up to 7 Rally Mic Pods for expanded audio coverage in larger rooms



OPTIONAL RALLY MIC POD HUB

Connect 1 to 3 Rally Mic Pods or additional Mic Pod Hubs for flexible single-wire cabling



OPTIONAL RALLY MOUNTING KIT

Rally Mounting Kit with cable retainers and mounting brackets for Rally Camera, Rally Speakers (x2), Table Hub, and Display Hub

TECH SPECS

RALLY CAMERA

Ultra-HD imaging system supports:
4K, 1440p, 1080p, 900p, 720p, and SD at 30fps
1080p, 720p at 30 fps and 60 fps

Smooth motorized pan, tilt and zoom

Pan: ±90°

Tilt: +50°/-90°

15x HD zoom

90° field of view

Adaptive pan and tilt speed up to 70°/second
(slows when zoomed in for easier control)

Automatic inversion detection to correct image
orientation and camera controls when mounted
upside down

Autofocus

3 camera presets

Kensington® security slot

Video mute/unmute LED indicator

Standard tripod thread

Lens parks at -90° in sleep mode for assured
privacy

RALLY MIC POD

Pickup range: 15 ft/4.5m diameter

Four microphones with eight beamforming
elements

Mute button with LED status indicator

Captive cable: 9.6 ft (2.95m)

Daisy chain up to 7 Rally Mic Pods

Recommended participants:

Rally (one Mic Pod): 10

Rally Plus (two Mic Pods): 16

Additional participants per Mic Pod: 6

Recommended participants for Rally with
7 Mic Pods: 46

RALLY SPEAKER

High-performance 3" (76mm) driver

Patent pending suspension system eliminates
vibration-induced camera shake and audio
interference

Mini XLR cable (9.6 ft (2.95m)) connects to Rally
Display Hub for both signal and power

RALLY TABLE HUB

Single cable (CAT6A) connection to Rally
Display Hub (16.4 ft (5m) CAT6A Ethernet cable
included, supports customer-supplied cables up
to 164 ft (50 m))

Active speaker detection: analyzes audio from up
to 7 Mic Pods and 56 beams every 8ms

12 Pin connector for Rally Mic Pod

HDMI Type A for wired content sharing

HDMI Type A for display

Power input

USB Type C (Ultra HD/4K capable)

USB Type A (reserved for future capability)

USB Type B (connects to meeting room
computer)

RJ45 (Ethernet)

Bluetooth® wireless technology

RALLY DISPLAY HUB

HDMI Type A (x2) (connects to displays)

Power input

USB C (connects to Rally Camera)

USB Type B (connects to meeting room
computer)

RJ45 (connects to Table Hub)

Mini XLR (x2) (connects to Rally Speakers)

Powers one or two Rally Speakers

REMOTE CONTROL

RF remote control (line of sight not required)

CR2032 batteries (included)

CABLES/POWER

Camera to Display Hub
6.5 ft (2m) USB 3.1 Type C to USB Type C 3.1

Conference Room Computer to Display or Table
Hub
6.5 ft (2m) USB 3.1 Type A to USB Type B

Display Hub to Table Hub
16.4 ft (5m) CAT6A Ethernet cable (supports
customer-supplied cables up to 164 ft (50 m))

Display Hub to Speaker (x2)
9.6 ft (2.95m) Mini XLR (supports customer-
supplied extension cables up to 9.8 ft (3m))

Conference Room Computer to Displays (x2)
6.5 ft (2m) HDMI A

Mic Pod
9.6 ft (2.95m): Hardwired with 12 pin connector

Power Outlets to Power Supplies (x2)
3.2 ft (1m)

Power Supplies to Table Hub/Display Hub (x2)
4.9 ft (1.5m)

RIGHTSENSE TECHNOLOGIES

RightLight with Wide Dynamic Range (WDR)

RightSight automatic camera control¹

RightSound Mic Matrix

RightSound Anti-Vibration Speakers

COMPATIBILITY AND INTEGRATIONS

Plug-and-play USB connectivity

Certified for Skype for Business and ready for
Teams

Certified for Google Hangouts Meet Hardware

Zoom Certified

Cisco Compatible

Compatible with BlueJeans, BroadSoft®,
GoToMeeting®, Vidyo™, and other video
conferencing, recording, and broadcasting
applications that support USB cameras



PRODUCT SPECIFICATIONS

Rally

Part #: 960-001217
Price: \$1999
UPC: 097855140203

Rally Plus

Part #: 960-001225
Price: \$2499
UPC: 097855140227

Rally Speaker

Part #: 960-001230
Price: \$249
UPC: 097855142962

Rally Mic Pod

Part #: 989-000430
Price: \$349
UPC: 097855142955

Rally Mic Pod Hub

Part #: 939-001647
Price: \$249
UPC: 097855143143

Rally Mounting Kit

Part #: 939-001644
Price: \$149
UPC: 097855142979

SOFTWARE DOWNLOADS

Logitech Camera Settings software

WARRANTY

2-year limited hardware warranty

INSIDE THE BOX

Rally Camera
Speaker: 1 (Rally) or 2 (Rally Plus)
Mic Pod: 1 (Rally) or 2 (Rally Plus)
Table Hub
Display Hub
2 x Power Supplies
Remote Control
USB C to C cable
USB A to B cable
CAT6A
2 x HDMI A to A cable
Documentation

PRODUCT DIMENSIONS

Rally Camera

7.19" x 5.98" x 5.98"
182.5 mm x 152 mm x 152 mm

Rally Speaker

4.05" x 17.67" x 3.15"
103mm x 449mm x 80mm

Rally Mic Pod

0.83" x 4.01" x 4.01"
21mm x 102mm x 102mm

Rally Table Hub

1.57" x 6.93" x 5.43"
40mm x 176mm x 138mm

Rally Display Hub

1.57" x 8.11" x 7.05"
40mm x 206mm x 179mm

Rally Mic Pod Hub

0.63" x 4.01" x 4.01"
16mm x 102mm x 102mm

SYSTEM REQUIREMENTS

UVC/plug-and-play compatible
Windows® 10, 8.1, 7
macOS® 10.10 or later
Chrome OS™

*RightSight is enabled by a software download with initial support for Windows® 10. Please see www.logitech.com/rightsight for availability.

www.logitech.com/rally


To order, contact your reseller or call us
at 800-308-8666

Published October 2018

Logitech Inc. 7700 Gateway Blvd., Newark, CA 94560

© 2018 Logitech. Logitech, the Logitech Logo and other Logitech marks are owned by Logitech and may be registered.

All other trademarks are the properties of their respective owners. Logitech assumes no responsibility for any errors that may appear in this publication. Product, pricing and feature information contained herein is subject to change without notice.

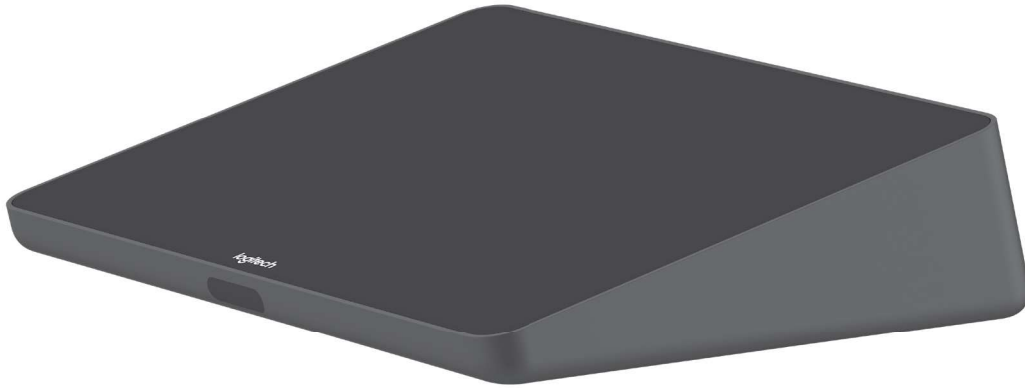

DATA SHEET **LOGITECH TAP**

Deliver one-touch join, calendar integration, instant content sharing, and a consistent experience across meeting rooms. With a sleek design, silent operation, and motion sensor for always-on readiness, Tap brings ease and convenience to video collaboration.

MEETING ROOM TOUCH CONTROLLER FOR VIDEO CONFERENCING ROOM SOLUTIONS

More than just a meeting room touch controller, Logitech Tap is what helps you achieve a consistent user experience across your entire deployment.

Boasting a spacious 10.1" touchscreen, low-profile enclosure, and multiple mounting accessories, Logitech Tap delivers a sleek appearance and convenient placement options that support a wide range of room sizes and layouts. And, with its HDMI input, content sharing is instant and effortless. Wireless content sharing is also available depending on your chosen video conferencing service.



- 1 One-touch join:** Easily start and join meetings with just one tap.
- 2 10.1" touch display:** Spacious and responsive touch screen resists fingerprints and glare for high legibility and easy operation.
- 3 Sleek, low profile:** Comfortable 14° angle allows for easy viewing, while providing an unobtrusive presence in the room.
- 4 Always-on readiness:** Built-in motion sensor saves power when idle, and powers on when a person approaches.
- 5 Headphone jack:** Extends the host computer's wired audio capabilities to the tabletop, ideal for private conversations and for the hearing-impaired.
- 6 Dual cable exits:** A sturdy metal cover with removable bottom and rear exits keep cables tidy and secure.
- 7 Clean cable management:** Built-in cable retention and strain relief system hides the cable entirely within its enclosure, and secures it to prevent unwanted disconnections.
- 8 USB accessory port:** Connect an accessory such as a USB speakerphone.
- 9 HDMI input for content sharing:** Provides instant wired content sharing when used with Google Meet™, Microsoft Teams Rooms™, and Zoom Rooms™.
- 10 Anti-theft protection:** Keep Tap securely in place by connecting a security cable to one of Tap's two Kensington lock slots, one on the bottom and another at the back.

ENTERPRISE READY



Clean Installation

Flexible cabling lets you locate Tap near participants for convenient operation while installing the host computer in a cabinet, beneath a table, or behind a display.





Multiple Mounting Options

Secure Tap flat to the table, raise the viewing angle, or mount it on the wall to conserve space, minimize cabling, and optimize the user experience.

ROOM SOLUTIONS WITH LOGITECH TAP

Easily deploy video meetings with pre-configured Logitech room solutions for Google Meet™ and Microsoft Teams™, which include everything you need - Tap, a conference camera or video bar, and PC compute - to start building meeting rooms of virtually any shape or size.



Find Your Perfect Match

Tap works seamlessly with Logitech's lineup of PC-based video bars and modular systems for small, medium, and large rooms.



Laptop Link for Meeting Rooms

Add bring-your-own-device versatility with Logitech Swytch, a convenient way to use the room's display and conference camera with any video meeting or webinar application.



Shown with Logitech Rally Bar.

PRODUCT DIMENSIONS		PORTS & INTERFACES	PACKAGE CONTENTS
Device Total Height x Width x Depth: 58 x 244 x 179 mm 2.3 x 9.6 x 7.0 in 1.25 kg (2.75 lbs)		USB 2.0/3.0/3.1 Type C (to PC) USB 2.0 Type A (for accessory connection) HDMI input (for content sharing) 3.5mm/1/8 " 4 pole Headset Jack Integrated ultrasonic speaker Integrated PIR Motion Sensor 100mm x 100mm VESA FDMI (Flat Display Mounting Interface) Kensington Lock Slots (2)	Logitech Tap with Cat5e Kit Tap Touch Controller Cat5e Kit Logitech Tap Receiver Dongle Transceiver 100-240v Power Supply with International Adaptor Set 2.97 m Cat5e Cable 7.0 m Cat5e Cable HDMI 1.4a cable 2.0 m Microfiber Cloth Documentation
Touchscreen 10.1" diagonal screen Display Angle: 14° Resolution: 1280 x 800 Anti-fingerprint and anti-glare oleophobic coating			
SYSTEM REQUIREMENTS	COMPATIBILITY AND CERTIFICATIONS		OPTIONAL ACCESSORIES
Windows® 10 Chrome™ OS 80 and higher Logi CollabOS USB 2.0, 3.0, or 3.1 Type A port	Logitech Tap is certified as a touch controller for video conferencing room solutions: Google Meet GoToRoom Microsoft Teams Rooms Pexip Room RingCentral Rooms Zoom Rooms See www.logitech.com/support/tap-compatibility for pending and granted certifications and compatibility updates. DisplayLink Plug and Display™: Tap connects via USB as an additional display for supported operating systems, including Windows 10 and Chrome OS		Table Mount Riser Mount Wall Mount Cat5e Kit (for Tap devices currently connected with Strong USB) Logitech Strong USB cable: 10 m, 25 m, 45 m (for Tap devices currently connected with Strong USB)
DEVICE MANAGEMENT			
Monitor and manage with Logitech Sync remote management, Microsoft Teams Admin Center, and Zoom Device Management platforms.			
WARRANTY		PART NUMBERS	
Standard: 2-year limited hardware warranty included Extended: Additional one-year extended warranty available at the time of hardware purchase. Contact your reseller for availability.		Logitech Tap with Cat5e Kit: 939-001950	



www.logitech.com/Tap

Contact your reseller
or contact us at
www.logitech.com/vcsales

Logitech Americas
7700 Gateway Blvd.
Newark, CA 94560 USA

Logitech Europe S.A.
EPFL - Quartier de l'Innovation
Daniel Borel Innovation Center
CH - 1015 Lausanne

Logitech Asia Pacific Ltd.
Tel : 852-2821-5900
Fax : 852-2520-2230

© 2021 Logitech. Logitech, the Logitech logo and other Logitech marks are owned by Logitech and may be registered. All other trademarks are the properties of their respective owners. Logitech assumes no responsibility for any errors that may appear in this publication. Product, pricing and feature information contained herein is subject to change without notice.

Published September 2021

ASUS NUC 14 PRO

Smaller, Faster, Better, AI Ready



ASUS NUC 14 Pro delivers best-in-class performance thanks to the all-new Intel® Core™ Ultra processor family. It is the most comprehensive mini-PC built with Intel vPro® Enterprise for exceptional security, manageability, and stability. With certified Bluetooth® dongle-free connectivity and three AI engines for high throughput, low power, and fast response, ASUS NUC 14 Pro delivers robust computing capabilities. It is equipped with Wi-Fi sensing for intelligent energy efficiency, and its “tried and trusted” 4x4-inch chassis is designed for toolless access, making upgrades easy, safe, and fast.

Key Selling Points

Performance: Delivers best-in-class performance among comparable mini-PC offerings

Manageability: Most comprehensive mini-PC with Intel vPro® Enterprise for exceptional security, manageability, and stability

AI Ready: Harnesses the prowess of Intel® Core™ Ultra processors’ three AI engines – GPU, NPU, and CPU – for high throughput, low power, and fast response

Wi-Fi Sensing: Takes advantage of Wi-Fi sensing to deliver instant availability while reducing power consumption

Wireless Connectivity: Delivers seamless connectivity for [certified Bluetooth® dongle-free experiences](#)

Customizable: Designed for toolless chassis access making upgrades easier, safer, and faster

Audience:

- Small and Medium Business Enterprises
- Retail
- Education
- Collaboration
- Remote Workers

Target Usages:

- Traditional and Smart Classrooms
- Communication File Sharing/ Virtual Meetings
- Daily Tasks/ Entertainment
- Digital Signage / Kiosk / POS

ASUS NUC 14 PRO

Mini-PC Specifications



Image A



Image B

Marketing Name	ASUS NUC 14 Pro Mini-PC		ASUS NUC 14 Pro Mini-PC
Project Code	NUC14RVH		NUC14RVK
Photo	Image A		Image B
ASUS Logo	Yes		Yes
ASUS NUC Logo	Yes		Yes
Color	Black		Black
OS Support	Windows 11 64-bit		Windows 11 64-bit
CPU	Intel® Core™ Ultra 7 Processor 165H w/ vPro, cTDP 40W Intel® Core™ Ultra 7 Processor 155H, cTDP 40W Intel® Core™ Ultra 5 Processor 135H w/ vPro, cTDP 40W Intel® Core™ Ultra 5 Processor 125H, cTDP 40W Intel® Core™ 3 Processor 100U, cTDP 25W		Intel® Core™ Ultra 7 Processor 165H w/ vPro, cTDP 40W Intel® Core™ Ultra 7 Processor 155H, cTDP 40W Intel® Core™ Ultra 5 Processor 135H w/ vPro, cTDP 40W Intel® Core™ Ultra 5 Processor 125H, cTDP 40W Intel® Core™ 3 Processor 100U, cTDP 25W
Chipset	Integrated		Integrated
Graphics	Intel® Arc™ GPU (Core Ultra) ¹ Intel® Graphics (Core3)		Intel® Arc™ GPU (Core Ultra) ¹ Intel® Graphics (Core3)
Memory	2 x SO-DIMM, Up to DDR5-5600, 48GB*2		2 x SO-DIMM, Up to DDR5-5600, 48GB*2
Storage	1 x M.2 2280 PCIe Gen4x4, supports 128GB~4TB NVMe SSD 1 x M.2 2242 PCIe Gen4x4, supports 128GB~2TB NVMe SSD 1 x SATA Port for 2.5in SSD/HDD, supports 128GB~4TB SATA drive		1 x M.2 2280 PCIe Gen4x4, supports 128GB~4TB NVMe SSD 1 x M.2 2242 PCIe Gen4x4, supports 128GB~2TB NVMe SSD
Wireless Network	Intel® Wi-Fi 6E AX211 (Gig+), Bluetooth 5.3		Intel® Wi-Fi 6E AX211 (Gig+), Bluetooth 5.3
LAN	Intel® Ethernet Controller I226-V/LM, 2.5G ²		Intel® Ethernet Controller I226-V/LM, 2.5G ²
Audio	N/A		N/A
TPM	fTPM		fTPM
Card Reader	None		None
HDMI CEC	Yes, 2 ports on back panel		Yes, 2 ports on back panel
Front I/O Ports	1 x USB 3.2 Gen2x2 Type-C 2 x USB 3.2 Gen2 Type-A		1 x USB 3.2 Gen2x2 Type-C 2 x USB 3.2 Gen2 Type-A
Back I/O Ports	2 x Thunderbolt 4 Type-C w/ DisplayPort 1.4 1 x USB 3.2 Gen 2 Type-A 1 x USB 2.0 Type-A 2 x HDMI 2.1 (TMDS) 1 x RJ45 LAN 1 x DC-in		2 x Thunderbolt 4 Type-C w/ DisplayPort 1.4 1 x USB 3.2 Gen 2 Type-A 1 x USB 2.0 Type-A 2 x HDMI 2.1 (TMDS) 1 x RJ45 LAN 1 x DC-in
Side I/O Ports	1 x Kensington Lock		1 x Kensington Lock
Power Supply	19VDC, 6.32A, 120W Power Adapter (Core Ultra) 19VDC, 4.74A, 90W Power Adapter (Core3)		19VDC, 6.32A, 120W Power Adapter (Core Ultra) 19VDC, 4.74A, 90W Power Adapter (Core3)
Operating Temp	0 to 40C		0 to 40C
Storage Temp	-40 to 60C		-40 to 60C
Humidity	0%-92% non-condensing		0%-92% non-condensing
Dimensions (W x D x H)	117mm x 112mm x 54mm		117mm x 112mm x 37mm
Weights	600g (Core Ultra) 571g (Core3)		500g (Core Ultra) 470g (Core3)
Accessories	AC Adapter+Power Cord ³ VESA Bracket and Screws M3 Screws for 2.5in Drive Cable Clip Safety/Caution/Regulatory Insert Warranty Card		AC Adapter+Power Cord ³ VESA Bracket and Screws Cable Clip Safety/Caution/Regulatory Insert Warranty Card

(1) Intel® Arc™ GPU requires using 2 x SO-DIMM

(2) Intel® Ethernet Controller I226-LM included on vPro enabled systems

(3) Power cord included is region specific, and some SKUs do not include the power cord

ASUS NUC 14 PRO

Kit Specifications



Image C



Image D

Marketing Name	ASUS NUC 14 Pro Kit	
Project Code	NUC14RVH-B	
Photo	Image C	Image D
ASUS Logo	No	No
ASUS NUC Logo	No	No
Color	Black	Black
OS Support	Windows 11 64-bit	Windows 11 64-bit
	Ubuntu 24.04 LTS 64-bit	Ubuntu 24.04 LTS 64-bit
	RedHat Enterprise Linux 64-bit	RedHat Enterprise Linux 64-bit
CPU	Intel® Core™ Ultra 7 Processor 165H w/ vPro, cTDP 40W	Intel® Core™ Ultra 7 Processor 165H w/ vPro, cTDP 40W
	Intel® Core™ Ultra 7 Processor 155H, cTDP 40W	Intel® Core™ Ultra 7 Processor 155H, cTDP 40W
	Intel® Core™ Ultra 5 Processor 135H w/ vPro, cTDP 40W	Intel® Core™ Ultra 5 Processor 135H w/ vPro, cTDP 40W
	Intel® Core™ Ultra 5 Processor 125H, cTDP 40W	Intel® Core™ Ultra 5 Processor 125H, cTDP 40W
	Intel® Core™ 3 Processor 100U, cTDP 25W	Intel® Core™ 3 Processor 100U, cTDP 25W
Chipset	Integrated	Integrated
Graphics	Intel® Arc™ GPU (Core Ultra) ¹	Intel® Arc™ GPU (Core Ultra) ¹
	Intel® Graphics (Core3)	Intel® Graphics (Core3)
Memory	2 x SO-DIMM, Up to DDR5-5600, 48GB*2	2 x SO-DIMM, Up to DDR5-5600, 48GB*2
Storage	1 x M.2 2280 PCIe Gen4x4, supports 128GB~4TB NVMe SSD	1 x M.2 2280 PCIe Gen4x4, supports 128GB~4TB NVMe SSD
	1 x M.2 2242 PCIe Gen4x4, supports 128GB~2TB NVMe SSD	1 x M.2 2242 PCIe Gen4x4, supports 128GB~2TB NVMe SSD
	1 x SATA Port for 2.5in SSD/HDD, supports 128GB~4TB SATA drive	
Wireless Network	Intel® Wi-Fi 6E AX211 (Gig+), Bluetooth 5.3	Intel® Wi-Fi 6E AX211 (Gig+), Bluetooth 5.3
LAN	Intel® Ethernet Controller I226-V/LM, 2.5G ²	Intel® Ethernet Controller I226-V/LM, 2.5G ²
Audio	N/A	N/A
TPM	fTPM	fTPM
Card Reader	None	None
HDMI CEC	Yes, 2 ports on back panel	Yes, 2 ports on back panel
Front I/O Ports	1 x USB 3.2 Gen2x2 Type-C	1 x USB 3.2 Gen2x2 Type-C
	2 x USB 3.2 Gen2 Type-A	2 x USB 3.2 Gen2 Type-A
Back I/O Ports	2 x Thunderbolt 4 Type-C w/ DisplayPort 1.4	2 x Thunderbolt 4 Type-C w/ DisplayPort 1.4
	1 x USB 3.2 Gen 2 Type-A	1 x USB 3.2 Gen 2 Type-A
	1 x USB 2.0 Type-A	1 x USB 2.0 Type-A
	2 x HDMI 2.1 (TMDS)	2 x HDMI 2.1 (TMDS)
	1 x RJ45 LAN	1 x RJ45 LAN
Side I/O Ports	1 x Kensington Lock	1 x Kensington Lock
	19VDC, 6.32A, 120W Power Adapter (Core Ultra)	19VDC, 6.32A, 120W Power Adapter (Core Ultra)
Power Supply	19VDC, 4.74A, 90W Power Adapter (Core3)	19VDC, 4.74A, 90W Power Adapter (Core3)
Operating Temp	0 to 40C	0 to 40C
Storage Temp	-40 to 60C	-40 to 60C
Humidity	0%-92% non-condensing	0%-92% non-condensing
Dimensions (W x D x H)	117mm x 112mm x 54mm	117mm x 112mm x 37mm
Weights	600g (Core Ultra)	500g (Core Ultra)
	571g (Core3)	470g (Core3)
Accessories	AC Adapter+Power Cord ³	AC Adapter+Power Cord ³
	VESA Bracket and Screws	VESA Bracket and Screws
	M3 Screws for 2.5in Drive	Cable Clip
	Cable Clip	Safety/Caution/Regulatory Insert
	Safety/Caution/Regulatory Insert	Warranty Card
	Warranty Card	

(1) Intel® Arc™ GPU requires using 2 x SO-DIMM

(2) Intel® Ethernet Controller I226-LM included on vPro enabled systems

(3) Power cord included is region specific, and some SKUs do not include the power cord

ASUS NUC 14 PRO



Image E

Board Specifications

Marketing Name	ASUS NUC 14 Pro Board
Project Code	NUC14RVB-M
Photo	Image E
ASUS Logo	N/A
ASUS NUC Logo	N/A
Color	N/A
OS Support	Windows 11 64-bit Ubuntu 24.04 LTS 64-bit RedHat Enterprise Linux 64-bit
CPU	Intel® Core™ Ultra 7 Processor 165H w/ vPro, cTDP 40W Intel® Core™ Ultra 7 Processor 155H, cTDP 40W Intel® Core™ Ultra 5 Processor 135H w/ vPro, cTDP 40W Intel® Core™ Ultra 5 Processor 125H, cTDP 40W Intel® Core™ 3 Processor 100U, cTDP 25W
Chipset	Integrated
Graphics	Intel® Arc™ GPU (Core Ultra) ¹ Intel® Graphics (Core3)
Memory	2 x SO-DIMM, Up to DDR5-5600, 48GB*2
Storage	1 x M.2 2280 PCIe Gen4x4, supports 128GB~4TB NVMe SSD 1 x M.2 2242 PCIe Gen4x4, supports 128GB~2TB NVMe SSD 1 x SATA Power/DATA header for 2.5in SSD/HDD, supports 128GB~4TB SATA drive
Wireless Network	Intel® Wi-Fi 6E AX211 (Gig+), Bluetooth 5.3
LAN	Intel® Ethernet Controller I226-V/LM, 2.5G ²
Audio	N/A
TPM	fTPM
Card Reader	None
HDMI CEC	Yes, 2 ports on back panel
Front I/O Ports	1 x USB 3.2 Gen2x2 Type-C 2 x USB 3.2 Gen2 Type-A
Back I/O Ports	2 x Thunderbolt 4 Type-C w/ DisplayPort 1.4 1 x USB 3.2 Gen 2 Type-A 1 x USB 2.0 Type-A 2 x HDMI 2.1 (TMDS) 1 x RJ45 LAN 1 x DC-in
Side I/O Ports	N/A
Power Supply	Not Included
Operating Temp	0 to 50C
Storage Temp	-40 to 60C
Humidity	0%-92% non-condensing
Dimensions (W x D x H)	107mm x 102mm x 29mm
Weights	227g (Core Ultra) 195g (Core3)
Accessories	Warranty Card Safety/Caution/Regulatory Insert


(1) Intel® Arc™ GPU requires using 2 x SO-DIMM

(2) Intel® Ethernet Controller I226-LM included on vPro enabled systems

(3) Power cord included is region specific, and some SKUs do not include the power cord


ASUS NUC 14 PRO

Model NUC14RVH (Tall) Connections

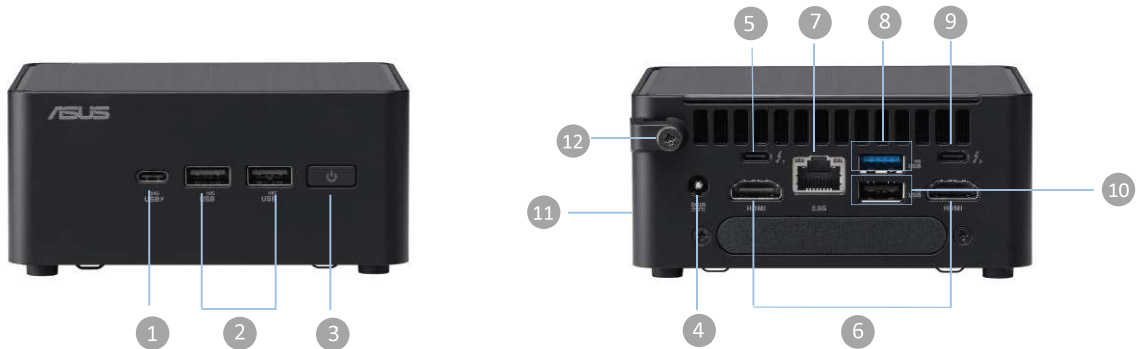

- | | | |
|-----------------------------|----------------------------|--|
| 1 1x USB 3.2 Gen2x2, Type-C | 5 1x Thunderbolt™ 4 | 9 1x Thunderbolt™ 4 |
| 2 2x USB 3.2 Gen2, Type-A | 6 2x HDMI 2.1 (TMDS) | 10 1x USB 2.0, Type-A |
| 3 1x Power Bottom | 7 1x 2.5Gb Ethernet | 11 1x Kensington Lock (Side Port) |
| 4 1x DC-in | 8 1x USB 3.2 Gen 2, Type-A | 12 1x Security mechanism for power cable |

Model NUC14RVK (Slim) Connections

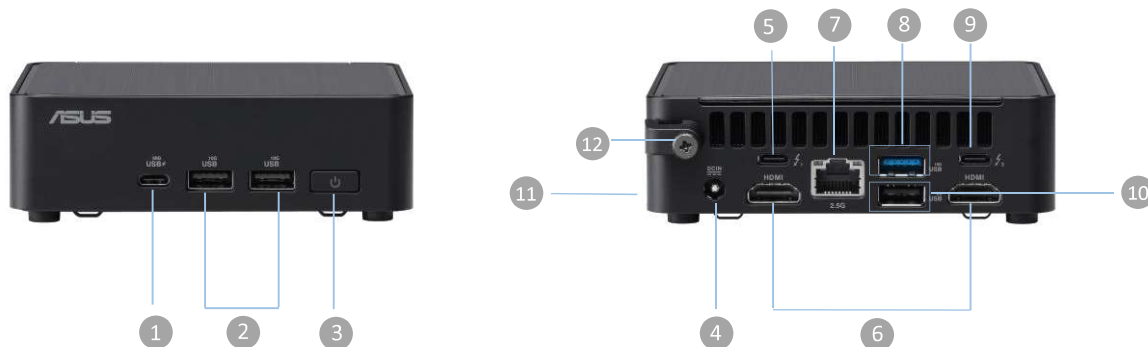

- | | | |
|-----------------------------|----------------------------|--|
| 1 1x USB 3.2 Gen2x2, Type-C | 5 1x Thunderbolt™ 4 | 9 1x Thunderbolt™ 4 |
| 2 2x USB 3.2 Gen2, Type-A | 6 2x HDMI 2.1 (TMDS) | 10 1x USB 2.0, Type-A |
| 3 1x Power Bottom | 7 1x 2.5Gb Ethernet | 11 1x Kensington Lock (Side Port) |
| 4 1x DC-in | 8 1x USB 3.2 Gen 2, Type-A | 12 1x Security mechanism for power cable |

ASUS NUC 14 PRO


What's in the box



Or



NUC 14 PRO




Power Adapter


90 / 120 W



Inserts



Power Cord*



VESA bracket and
Screws

NOTE:

- The most up-to-date and accurate product specifications are available on www.asus.com for download.
- Product and accessory images are for illustrative purposes only. The actual appearance and specifications may vary depending on the model.
- *The bundled power adapter may vary depending on the model and the country (or region) of sale.
- Some bundled accessories may vary depending on the model. For details on these accessories, refer to their respective user manuals.
- If the device or its components fail or malfunction during normal and proper use within the warranty period, bring the warranty card to the ASUS Service Center for replacement of the defective components.